Box Seq

A

03-30-00

JC760 U.S. PTO 03/29/00

Please type a plus sign (+) inside this box → [+]

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	
First Inventor or Application Identifier	Edward Behrens
Title	A SYSTEM AND METHOD FOR REMOTELY
Express Mail Label No.	EJ130610082US

jc539 U.S. PTO 09/538063 03/29/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. [X] * Fee Transmittal Form *(e.g., PTO/SB/17)*
(Submit an original and a duplicate for fee processing)
2. [X] Specification [Total Pages 57]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings *(if filed)*
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. [X] Drawing(s) *(35 U.S.C. 113)* [Total Sheets 12]
4. Oath or Declaration [Total Pages 4]
   a. [X] Newly executed (original or copy)
   b. [ ] Copy from a prior application (37 C.F.R. § 1.63(d))
   (for continuation/divisional with Box 16 completed)
      i. [ ] DELETION OF INVENTOR(S)
      Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

5. [ ] Microfiche Computer Program *(Appendix)*
6. Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all necessary)*
   a. [ ] Computer Readable Copy
   b. [ ] Paper Copy (identical to computer copy)
   c. [ ] Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. [X] Assignment Papers (cover sheet & document(s))
8. [X] 37 C.F.R.§3.73(b) Statement *(when there is an assignee)* [X] Power of Attorney
9. [ ] English Translation Document *(if applicable)*
10. [X] Information Disclosure Statement (IDS)/PTO-1449 [X] Copies of IDS Citations
11. [ ] Preliminary Amendment
12. [X] Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. [ ] * Small Entity Statement(s) *(PTO/SB/09-12)* [ ] Statement filed in prior application, Status still proper and desired
14. [ ] Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. [X] Other: floppy disk

16. **If a CONTINUING APPLICATION,** *check appropriate box, and supply the requisite information below and in a preliminary amendment:*
[ ] Continuation [ ] Divisional [ ] Continuation-in-part (CIP) of prior application No: _____/_____
Prior application information: Examiner _____ *Group / Art Unit:* _____
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

[ ] *Customer Number or Bar Code Label* *(Insert Customer No. or Attach bar code label here)* or [X] *Correspondence address below*

Name	Michael Ha				
Address	26322 Towne Centre Drive #238				
City	Foothill Ranch	State	California	Zip Code	92610
Country	United States	Telephone	949-716-0937	Fax	

Name (Print/Type)	Michael Ha	Registration No. (Attorney/Agent)	39,700
Signature		Date	March 29, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Patent Application of
Edward Behrens, President of Epicenter, Inc.,
Tho Tu,
Van Hua, Director of Engineering of Epicenter, Inc.,
David Wang, Chief Technical Officer of Epicenter, Inc.,
John Goodin, Design Director of Compression, Inc.,
Robert Matthes, Industrial Designer of Compression, Inc.
for
TITLE: A SYSTEM AND METHOD FOR REMOTELY CONTROLLING AND MONITORING A PLURALITY OF COMPUTER SYSTEMS

TITLE OF INVENTION

A system and method for remotely controlling and monitoring a plurality of computer systems.

CROSS-REFERENCE TO RELATED APPLICATIONS

Not applicable.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

REFERENCE TO MICROFICHE APPENDIX

Not applicable.

BACKGROUND OF THE INVENTION - FIELD OF INVENTION

This invention relates to the control and monitoring of computers, specifically to an improved Keyboard-Video-Mouse switch fully integrated with a video display, character input device, and pointing device.

BACKGROUND OF THE INVENTION - DISCUSSION OF PRIOR ART

Many computers capable of performing general purpose and specialized tasks require a computer room with raised flooring and air conditioning. Because computer room space is quite expensive, such computers must be mounted in a rack. Having a separate video display, character input device, and pointing device for each computer is impractical and wastes valuable computer room space. Keyboard-Video-Mouse (KVM) switches were developed which allows a single video display, character input device, and pointing device to communicate with one or more rack-mounted computers. However, requiring a separate video display, a separate character input device, a separate pointing device, and a separate KVM switch has the disadvantages of:

(a) consuming valuable rack space
(b) requiring a separate connector for video display, character input, and pointing data and signals on the KVM switch
(c) likelihood of malfunction due to a loose connection or failure of the aforementioned connectors and cables

(d) requiring the user to slide a video display monitor separately from a keyboard and pointing device from the rack before using the video display monitor and the keyboard and pointing device.

U.S. patents 5,721,842 (1998) and 5,884,096 (1999) and 5,937,176 (1999) to Beasley, et. al. (1998) merely specify a switching system but no display, character input device, or pointing device. Video signals are sent on cables separate from the keyboard and mouse signals. Furthermore, separate connectors are required on the switch side and on the remote computer side of cables used for video display, keyboard, and mouse. The programmable switch described as part of the claims uses only a single processor.

U.S. patent 5,732,212 to Perholtz, et. al. (1998) provides for a method of redirecting video display, keyboard, and mouse signals to a switch via a serial or parallel port or over a modem or network device on the computer being monitored or controlled. However, said method requires the use of special software or hardware which must be installed on the computer being monitored or controlled.

U.S. Patent 5,499,377 to Lee (1996) describes a multi-computer access switching system. Although sixteen (16) computers may be accessed from a work center the system requires a cable bus and a manual switch rather than an electronically controlled switch which may be controlled by a command entered from a keyboard.

U.S. Patent 5,949,643 to Batio (1999) describes a portable computer having split keyboard and pivotal display screen halves. Similarly, U.S. Patent 5,926,364 to Karidis (1999) describes a tri-fold personal computer with touchpad and keyboard. U.S. Patent 5,913,034 to Malcolm (1999) describes an administrator station for a computer system. However, such a device requires a notebook computer in order to function. In fact all of the described inventions and devices like them provide a display, keyboard, and pointing device but they are full fledged computers complete with CPU, memory, and secondary storage device and require an operating system in order to function. Such devices are relatively expensive and consume more power and space compared to a device which only has a display, keyboard, and pointing device.

Similarly, devices such as the device access controller in U.S. Patent 5,878,248 to Tehranian, et. al. (1999) also require a computer. Such devices also do not offer the convenience of easily multiplexing keyboard data, pointer data, and video signals from multiple computers.

The reference http://www.compaq.com/products/storageworks/options/1udrawerindex.html describes a keyboard drawer which consumes 1U (1.75 inches) of vertical rack space and the reference http://www.compaq.com/products/storageworks/options/skvm_index.html describes a KVM switch which may be mounted behind the 1U keyboard drawer but a video display device must be mounted separately in a rack.

ICS provides a flat panel display attached by a hinge to a drawer for a keyboard and pointing device. However, it consumes 2U (1.75 inches x 2) of vertical rack space.

Raritan offers a KVM switch, which offers one processor per channel or computer system. However, only one processor is active at a time and only when the channel associated with it is actively selected. Raritan KVM switches also offer a single connector for each computer system but the connector is wide and space consuming. The cascade mechanism used by Raritan does not utilize differential signaling for improved reliability.

Current KVM switches do not provide a means for upgrade, downloading or uploading of code, testing, or configuration of the KVM switch from a remote location. Furthermore, existing KVM switches do not have the capability of communicating with each other such that a plurality of interconnected KVM switches appear to the human user as a single KVM switch. The human user must be aware of which KVM switch a particular computer is connected in order to make use of the KVM switch. For example, the video output port, keyboard input port, and mouse input port of a first KVM switch must be connected into one of the video input ports, one of the keyboard output ports, and one of the mouse output ports of a second KVM switch. A human user must first select the video input port, keyboard output port, and mouse output port on the second KVM switch before the user is able to access the first KVM switch.

BRIEF SUMMARY OF THE INVENTION

In accordance with the present invention a intelligent control and monitoring system comprises at least one first processor communicating with a second processor, a video switch, video display, character input device, pointing device, and cable capable of carrying video signals, character input data, and pointing input data.

Objects and Advantages

Accordingly, several objects and advantages of the present invention are:

(a) To provide a compact control and monitoring system which minimizes the amount of rack space consumed by the following separate elements: KVM switch, video display, character input device, and pointing device;

(b) To provide a compact control and monitoring system which accepts data for video display and transmits data for character input and pointing to a computer but requires a single connector at the KVM switch;

(c) To provide a compact control and monitoring system which reduces the likelihood of a malfunction due to a loose connection or cable failure by reducing the number of cables and connections that must be made;

(d) To provide a compact control and monitoring system which extends out of a rack as a single unit;

Further objects and advantages are:

(a) To provide a control and monitoring system which allows upgrades, downloading or uploading of code, testing, and configuration from a remote location;

(b) To provide a control and monitoring system which can communicate with other control and monitoring systems;

(c) To provide a plurality of interconnected control and monitoring systems which appear to be a single control and monitoring system to a human user;

(d) To provide a control and monitoring system which has the ability to switch off power to the video display after a period of time has elapsed, where said period of time has been specified by a human user;

(e) To provide a control and monitoring system which utilizes a plurality of processing units, thereby reducing the likelihood of losing data from one of the computers connected to the compact control and monitoring system;

(f) To provide a control and monitoring system where a video display, a character input device, and a pointing device are protected from dust and impact from objects when the control and monitoring system is stored in a rack;

(g) To provide a control and monitoring system where no special software or hardware is required on the computer being monitored or controlled.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

Fig. 1 shows a rear view of the main unit.

Fig. 2 shows front view of the main unit.

Fig. 3 shows a rear view as installed in a rack.

Fig. 4 shows a front view as installed in a rack.

Fig. 5 shows a cable used to connect a computer system to the control and monitoring system.

Fig. 6 shows the connectors used on the cable used to connect a computer system to the control and monitoring system.

Figs. 7 and 8 show a block diagram of the control and monitoring system.

Fig. 9 shows a cable used to daisy chain multiple control and monitoring systems together.

Fig. 10 shows the connectors used on the cable in Fig. 9.

Fig. 11 shows a schematic view of a terminator used on the open end of the last cable used in a daisy chain of multiple control and monitoring systems.

Fig. 12A shows a rear view of the terminator in Fig. 11.

Fig. 12B shows a front view of the terminator in Fig. 11.

Reference Numerals In Drawings

8	Housing
10	External Video Out - fifteen position D-sub
12	Communications Port
14	External Keyboard Port - Mini-DIN
16	External Mouse Port - Mini-DIN
20	Keyboard-Video-Mouse Port 1 - fifteen position D-sub
22	Keyboard-Video-Mouse Port 2 - fifteen position D-sub
24	Keyboard-Video-Mouse Port 3 - fifteen position D-sub
26	Keyboard-Video-Mouse Port 4 - fifteen position D-sub
28	Keyboard-Video-Mouse Port 5 - fifteen position D-sub
30	Keyboard-Video-Mouse Port 6 - fifteen position D-sub
32	Keyboard-Video-Mouse Port 7 - fifteen position D-sub
34	Keyboard-Video-Mouse Port 8 - fifteen position D-sub

36 Keyboard-Video-Mouse Port 9 - fifteen position D-sub
38 Keyboard-Video-Mouse Port 10 - fifteen position D-sub
40 Keyboard-Video-Mouse Port 11 - fifteen position D-sub
42 Keyboard-Video-Mouse Port 12 - fifteen position D-sub
44 Keyboard-Video-Mouse Port 13 - fifteen position D-sub
46 Keyboard-Video-Mouse Port 14 - fifteen position D-sub
48 Keyboard-Video-Mouse Port 15 - fifteen position D-sub
50 Keyboard-Video-Mouse Port 16 - fifteen position D-sub
54 Internal Video Port - fifteen position D-sub
56 Internal Keyboard Port - Mini-DIN
58 Internal Mouse Port - Mini-DIN
60 DC Power Out to display, mouse, and keyboard
62 DC Power In
64 Power Supply AC Adapter receptacle
66 AC Power Supply
68 Video display
69 Housing for video display
70 Keyboard and touchpad housing
72 Keyboard
74 Touchpad
80 DC Power Cable
82 Cable stress relief arm
84 DC Power Cable
86 Mouse Cable
88 Keyboard Cable
90 Video Cable
92 Rail
94 Rail
100 Keyboard-Video-Mouse (KVM) Cable
102 KVM Connector - Male fifteen position D-sub
104 Video Connector - Male fifteen position D-sub
106 Keyboard Connector - Male Mini-DIN
108 Mouse Connector - Male Mini-DIN
121 KVM Connector Position 1 - Red Video
122 KVM Connector Position 2 - Green Video
123 KVM Connector Position 3 - Blue Video

124 KVM Connector Position 4 - Keyboard Power
125 KVM Connector Position 5 - Keyboard Clock
126 KVM Connector Position 6 - Video Ground
127 KVM Connector Position 7 - Video Ground
128 KVM Connector Position 8 - Video Ground
129 KVM Connector Position 9 - Mouse Power
130 KVM Connector Position 10 - Keyboard Data
131 KVM Connector Position 11 - Mouse Clock
132 KVM Connector Position 12 - Mouse Data
133 KVM Connector Position 13 - Horizontal Sync
134 KVM Connector Position 14 - Vertical Sync
135 KVM Connector Position 15 - Keyboard and Mouse Ground
141 Video Connector Position 1 - Red Video
142 Video Connector Position 2 - Green Video
143 Video Connector Position 3 - Blue Video
144 Video Connector Position 4 - ID BIT 2
145 Video Connector Position 5 - DDC Signal Return
146 Video Connector Position 6 - Red Video Signal Return
147 Video Connector Position 7 - Green Video Signal Return
148 Video Connector Position 8 - Blue Video Signal Return
149 Video Connector Position 9 - Power Line for DDC
150 Video Connector Position 10 - SYNC Signal Return
151 Video Connector Position 11 - ID Bit 11 (Reserved)
152 Video Connector Position 12 - Data Line for DDC
153 Video Connector Position 13 - Horizontal Sync
154 Video Connector Position 14 - Vertical Sync
155 Clock Line for DDC
161 KB Connector Position 1 - Keyboard Data
162 KB Connector Position 2 - No Connection
163 KB Connector Position 3 - Signal Ground
164 KB Connector Position 4 - +5V Supply
165 KB Connector Position 5 - KB Clock
166 KB Connector Position 6 - No Connection
171 Mouse Connector Position 1 - Mouse Data
172 Mouse Connector Position 2 - No Connection
173 Mouse Connector Position 3 - Signal Ground

174 Mouse Connector Position 4 - +5 Supply
175 Mouse Connector Position 5 - Mouse Clock
176 Mouse Connector Position 6 - No Connection
200 Keyboard and Mouse signals to KVM port 20
202 Keyboard and Mouse signals to KVM port 22
204 Keyboard and Mouse signals to KVM port 24
206 Keyboard and Mouse signals to KVM port 26
208 Keyboard and Mouse signals to KVM port 28
210 Keyboard and Mouse signals to KVM port 30
212 Keyboard and Mouse signals to KVM port 32
214 Keyboard and Mouse signals to KVM port 34
216 Keyboard and Mouse signals to KVM port 36
218 Keyboard and Mouse signals to KVM port 38
220 Keyboard and Mouse signals to KVM port 40
222 Keyboard and Mouse signals to KVM port 42
224 Keyboard and Mouse signals to KVM port 44
226 Keyboard and Mouse signals to KVM port 46
228 Keyboard and Mouse signals to KVM port 48
230 Keyboard and Mouse signals to KVM port 50
232 Processor
234 Processor
236 Processor
238 Processor
240 Processor
242 Processor
244 Processor
246 Processor
248 Clock generator for processor 232
250 Clock signal
252 Clock generator for processor 234
254 Clock signal
256 Clock generator for processor 236
258 Clock signal
260 Clock generator for processor 238
262 Clock signal
264 Clock generator for processor 240

266 Clock signal
268 Clock generator for processor 242
270 Clock signal
272 Clock generator for processor 244
274 Clock signal
276 Clock generator for processor 246
278 Clock signal
280 Keyboard and Mouse signals from processor 232
282 Keyboard and Mouse signals from processor 234
284 Keyboard and Mouse signals from processor 236
286 Keyboard and Mouse signals from processor 238
288 Keyboard and Mouse signals from processor 240
290 Keyboard and Mouse signals from processor 242
292 Keyboard and Mouse signals from processor 244
294 Keyboard and Mouse signals from processor 246
296 Processor
298 Programmable Logic
300 Control
302 Non-volatile Random Access Memory (NVRAM)
304 Control
306 Data
308 Flash memory
310 Data
312 Clock generator
314 Clock signal
316 Keyboard signals
318 Mouse signals
320 Data
322 Video Select
324 Video Switch
326 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 20
328 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 22
330 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 24

332 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 26

334 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 28

336 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 30

338 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 32

340 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 34

342 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 36

344 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 38

346 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 40

348 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 42

350 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 44

352 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 46

354 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 48

356 Red, Green, Blue, Horizontal sync, and Vertical sync video signals from KVM Port 50

358 Horizontal sync

360 Vertical sync

362 Red, Green, and Blue video signals

364 Programmable Logic

366 Data

367 Horizontal Sync and Vertical sync

368 Data

370 Processor

372 Clock generator

374 Clock signal

376 EIA-RS-232 Transmitter/Receiver

378 EIA-RS-485 Transceiver

380 EIA-RS-485 Transceiver

382 EIA-RS-485 Transceiver

384 Transmit Data (TX)

386 Receive Data (RX)

388 Transmit Data (TX)

390 Receive Data (RX)

392 Differential Transmit/Receive High(Tx+)

396 Differential Transmit/Receive Low(Tx-)

398 Single-ended Transmit/Receive

400 Differential Receive/Transmit High(Rx+)

404 Differential Receive/Transmit Low(Rx-)

406 Single-ended Receive/Transmit

408 Differential Clock Out/In High (Clock+)

412 Differential Clock In/Out Low (Clock-)

414 Single-ended Clock In/Out

420 Video Driver

422 Red, Green, Blue, Horizontal sync, Vertical sync

424 Red, Green, Blue, Horizontal sync, Vertical sync

440 Daisy Chain cable

442 Connector for Communications Port and Daisy Chain

444 Connector for Communications Port and Daisy Chain

446 Connector for Communications Port and Termination

448 Connector for Communications Port and Termination

450 Connector for Communications Port and Daisy Chain position 1 - EIA-RS-485 Tx+

452 Connector for Communications Port and Daisy Chain position 2 - EIA-RS-232 TxD

454 Connector for Communications Port and Daisy Chain position 3 - EIA-RS-232 RxD

456 Connector for Communications Port and Daisy Chain position 4 - EIA-RS-485 Rx-

458 Connector for Communications Port and Daisy Chain position 5 - Ground

460 Connector for Communications Port and Daisy Chain position 6 -

EIA-RS-485 Tx-

462 Connector for Communications Port and Daisy Chain position 7 - EIA-RS-485 Clock-

464 Connector for Communications Port and Daisy Chain position 8 - EIA-RS-485 Clock+

466 Connector for Communications Port and Daisy Chain position 9 - EIA-RS-485 Rx+

468 Connector for Communications Port and Termination position 1 - EIA-RS-485 Tx+

470 Connector for Communications Port and Termination position 2 - EIA-RS-232 TxD

472 Connector for Communications Port and Termination position 3 - EIA-RS-232 RxD

474 Connector for Communications Port and Termination position 4 - EIA-RS-485 Rx-

476 Connector for Communications Port and Termination position 5 - Ground

478 Connector for Communications Port and Termination position 6 - EIA-RS-485 Tx-

480 Connector for Communications Port and Termination position 7 - EIA-RS-485 Clock-

482 Connector for Communications Port and Termination position 8 - EIA-RS-485 Clock+

484 Connector for Communications Port and Termination position 9 - EIA-RS-485 Rx+

486 Connector for Communications Port and Daisy Chain position 1 - EIA-RS-485 Tx+

488 Connector for Communications Port and Daisy Chain position 2 - EIA-RS-232 TxD

490 Connector for Communications Port and Daisy Chain position 3 - EIA-RS-232 RxD

492 Connector for Communications Port and Daisy Chain position 4 - EIA-RS-485 Rx-

494 Connector for Communications Port and Daisy Chain position 5 - Ground

496 Connector for Communications Port and Daisy Chain position 6 - EIA-RS-485 Tx-

498 Connector for Communications Port and Daisy Chain position 7 - EIA-RS-485 Clock-

500 Connector for Communications Port and Daisy Chain position 8 - EIA-RS-485 Clock+

502 Connector for Communications Port and Daisy Chain position 9 - EIA-RS-485 Rx+

504 Connector for Communications Port and Termination position 1 - EIA-RS-485 Tx+

506 Connector for Communications Port and Termination position 2 - EIA-RS-232 TxD

508 Connector for Communications Port and Termination position 3 - EIA-RS-232 RxD

510 Connector for Communications Port and Termination position 4 - EIA-RS-485 Rx-

512 Connector for Communications Port and Termination position 5 - Ground

514 Connector for Communications Port and Termination position 6 - EIA-RS-485 Tx-

516 Connector for Communications Port and Termination position 7 - EIA-RS-485 Clock-

518 Connector for Communications Port and Termination position 8 - EIA-RS-485 Clock+

520 Connector for Communications Port and Termination position 9 - EIA-RS-485 Rx+

610 Terminator for Daisy Chain

612 Resistor

614 Resistor

616 Resistor

620 Terminator Position 1

626 Terminator Position 4

630 Terminator Position 6

632 Terminator Position 7

634 Terminator Position 8

636 Terminator Position 9

DETAILED DESCRIPTION OF THE INVENTION

Preferred Embodiment - Figs. 1, 2, 3, and 4

A preferred embodiment of the control and monitoring system of the present invention is illustrated in FIG. 1 (rear view). In the presently preferred embodiment of the control and monitoring system, up to sixteen (16) computer systems may be controlled and monitored from a single control and monitoring system and up to two hundred fifty six (256) if a plurality of control and monitoring systems are connected together. However, those skilled in the art will recognize that the number of possible connections may be modified to accommodate an unlimited number of computer systems.

A main unit housing **8** provides a mounting base for the Mini-DIN, DB9, and fifteen position D-sub connectors. An external video display device compatible with the VGA standard may be connected to an External Video Port **10**. An External keyboard may be connected to an External Keyboard Port **14**. An external mouse or other pointing device may be connected to an External Mouse Port **16**. A computer or communications device capable of communicating with a computer may be connected via a standard IBM-type DB9 serial cable to the Communications Port **12**. A computer system may be connected to any of Keyboard-Video-Mouse (KVM) Ports 1-16 (**20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50**).

Fig. 2 details the present front view of the main unit **8** of the control and monitoring system. Power is supplied to the control and monitoring system through a power connector **62**. Power to a video display **68** (Fig. 4), a keyboard **72**, and a touchpad **74** (Fig. 3) is sent out through a power connector **60**. The video display **68** is connected to an internal video port **54**. The keyboard **72** is connected to an internal keyboard port **56**. The touchpad **74** is connected to an internal mouse port **58**.

Fig. 3 details the present rear view of the control and monitoring system in the open position. A power supply **66** receives power when a power cord is plugged into AC power receptacle **64** and connecting the male end of the three-prong AC power cord into a source for AC power such as a public utility wall outlet or a battery backup system. The

control and monitoring system receives power from a power supply cable **80** connected to a power connector **60**. A first housing **69** houses a display **68**. A second housing **70** houses a combined keyboard and pointing device comprising a keyboard **72**, and a touchpad **74**. The first housing and second housing are rotatably connected such that the display may be stored against the keyboard and pointing device and flipped out when needed. The first housing and second housing so connected are referred to as the administration station. The second housing may have a cowling or cover in a shape complementary to the shape of the power supply **66** and the main unit housing **8** such that any cables running between the administration station and the main unit housing **8** are covered when the administration station is stored. A power cable **84** supplies power from the main unit housing **8** through a power connector **60** to a display **68**, a keyboard **72**, and a pointing device **74**. A keyboard cable **86** connects the internal keyboard port **56** to the keyboard **72**. A mouse cable **88** connects the internal mouse port **58** to the touchpad **74**. A video cable **90** connects the internal video port **54** to the video display **68**. A cable tray arm **82** relieves stress on the cables, organizes the cables neatly and prevents them from tangling. The main unit **8** is connected to the power supply **66** and attached to a rail **92** and a rail **94**. The cable tray arm **82** is attached to the rail **94**. The keyboard **72**, touchpad **74**, and display **68** are mounted on a rail **92** and a rail **94** and may slide forward and backward along the rails. The display **68** rotates up and down via two hinges or other rotation mechanism.

Fig. 4 details the present front view of the control and monitoring system in an open position. The control and monitoring system may be mounted in a standard nineteen-inch wide rack but may also be used without the benefit of a rack. The preferred embodiment of the present invention consumes not more than 1U (1.75 inches) of vertical space while the keyboard **72**, touchpad **74**, and display **68** are in the stored position. Of course, the control and monitoring system may consume more or less vertical space while maintaining a compact profile.

Fig. 5 details a cable used to connect a computer system to any of the KVM Ports 1-16. The fifteen position D-sub connector **102** connects to any of the KVM Ports 1-16 (**20,22,24,26,28,30,32,34,36,38,40,**

42,44,46,48,50). The fifteen position D-sub connector **104** connects to the graphics adapter of the remote computer. The mini-DIN connector **106** connects to the keyboard port of the remote computer. The mini-DIN connector **108** connects to the mouse port of the remote computer.

Fig. 6 details a head on view of the connectors shown in fig. 5. The positions are connected in the following manner:

Keyboard-Video-Mouse (KVM) Male fifteen position D-sub Connector **102** Position	Connection Description	Position Connection
KVM Connector Position **121**	Red Video	Video Connector Position **141**
KVM Connector Position **122**	Green Video	Video Connector Position **142**
KVM Connector Position **123**	Blue Video	Video Connector Position **143**
KVM Connector Position **124**	Keyboard Power	Keyboard Connector Position **164**
KVM Connector Position **125**	Keyboard Clock	Keyboard Connector Position **165**
KVM Connector Position **126**	Red Video Signal Return	Video Connector Position **146**
KVM Connector Position **127**	Green Video Signal Return	Video Connector Position **147**
KVM Connector Position **128**	Blue Video Signal Return	Video Connector Position **148**
KVM Connector Position **129**	Mouse Power	Mouse Connector Position **174**
KVM Connector Position **130**	Keyboard Data	Keyboard Connector Position **161**
KVM Connector Position **131**	Mouse Clock	Mouse Connector Position **175**

KVM Connector Position **132**	Mouse Data	Mouse Connector Position **171**
KVM Connector Position **133**	Horizontal Sync	Video Connector Position **153**
KVM Connector Position **134**	Vertical Sync	Video Connector Position **154**
KVM Connector Position **135**	Keyboard and Mouse Ground	Keyboard Connector Position **163** and Mouse Connector Position **173**

Additionally, the cable shield runs along the portion of the KVM cable **100** extending from the Keyboard-Video-Mouse Male fifteen position D-sub Connector **102** side to the Video Male fifteen position D-sub Connector **104** side.

Figs. 7 and 8 depict a block diagram of the control and monitoring system. Two Keyboard-Video-Mouse (KVM) ports (**20,22,24,26,28,30,32,34, 36,38,40,42,44,46,48,50**) connect to a processor **232**, **234**, **236**, **238**, **240**, **242**, **244**, or **246**. Each of the processors controls two KVM ports. All eight processors **232, 234, 236, 238, 240, 242, 244,** and **246** connect to a processor **296**. Processor **296** connects to a video switch **324** and a processor **320**.

Keyboard and mouse signals **200** are sent and received between a KVM port **48** and a processor **232**.

Keyboard and mouse signals **202** are sent and received between a KVM port **50** and a processor **232**.

Keyboard and mouse signals **204** are sent and received between a KVM port **44** and a processor **234**.

Keyboard and mouse signals **206** are sent and received between a KVM port **46** and a processor **234**.

Keyboard and mouse signals **208** are sent and received between a KVM port **40** and a processor **236.**

Keyboard and mouse signals **210** are sent and received between a KVM port **42** and a processor **236**.

Keyboard and mouse signals **212** are sent and received between a KVM port **36** and a processor **238**.

Keyboard and mouse signals **214** are sent and received between a KVM port **38** and a processor **238**.

Keyboard and mouse signals **216** are sent and received between a KVM port **32** and a processor **240**.

Keyboard and mouse signals **218** are sent and received between a KVM port **34** and a processor **240**.

Keyboard and mouse signals **220** are sent and received between a KVM port **28** and a processor **242**.

Keyboard and mouse signals **222** are sent and received between a KVM port **30** and a processor **242**.

Keyboard and mouse signals **224** are sent and received between a KVM port **24** and a processor **244**.

Keyboard and mouse signals **226** are sent and received between a KVM port **26** and a processor **244**.

Keyboard and mouse signals **228** are sent and received between a KVM port **20** and a processor **246**.

Keyboard and mouse signals **230** are sent and received between a KVM port **22** and a processor **246**.

A clock generator **248** provides a clock signal **250** to processor **232**.

A clock generator **252** provides a clock signal **254** to processor **234**.

A clock generator **256** provides a clock signal **258** to processor **236**.

A clock generator **260** provides a clock signal **262** to processor **238**.

A clock generator **264** provides a clock signal **266** to processor **240**.

A clock generator **268** provides a clock signal **270** to processor **242**.

A clock generator **272** provides a clock signal **274** to processor **244**.

A clock generator **276** provides a clock signal **278** to processor **246**.

A processor **296** is connected to processors **232, 234, 236, 238, 240, 242, 244,** and **246**. A clock generator **312** provides a clock signal **314** to processor **296**. Data signals **310** travel between a flash memory **308** and a processor **296**. Data signals **300** travel between a programmable logic device and processor **296**. Data signals **306** travel between a Non-volatile Random Access Memory (NVRAM) **302** and a processor **296**. Control signals **304** travel between a NVRAM **302** and a programmable logic device **298**.

Processors **232, 234, 236, 238, 240, 242, 244,** and **246** are referred to as Port Controllers.

Keyboard signals **316** travels between a processor **296** and keyboard ports **14** and **56**. Mouse signals **318** travel between a processor **296** and mouse ports **16** and **58**.

Fig. 8 shows a video switch **324**. A processor **296** asserts a video select signal **322** to a video switch **324**. Processor **296** is referred to as the Main Controller.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **326** pass from KVM port **20** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **328** pass from KVM port **22** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **330** pass from KVM port **24** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **332** pass from KVM port **26** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **334** pass from KVM port **28** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **336** pass from KVM port **30** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **338** pass from KVM port **32** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **340** pass from KVM port **34** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **342** pass from KVM port **36** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **344** pass from KVM port **38** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **346** pass from KVM port **40** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **348** pass from KVM port **42** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **350** pass from KVM port **44** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **352** pass from KVM port **46** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **354** pass from KVM port **48** to video switch **324**.

Red, Green, Blue, Vertical Sync, and Horizontal Sync video signals **356** pass from KVM port **50** to video switch **324**.

Control **368** travels between a programmable logic device **364** and a processor **370**. Data **320** travels between a processor **296** and a processor **370**. A clock generator **372** provides a clock signal **374** to a processor **370**. Processor **370** is referred to as the Host Controller.

Transmit Data (TX) signals **384** travels from an EIA-RS-232 port **12** to an EIA-RS-232 Transmitter/Receiver **376**. Receive Data (RX) signals **386** travels from an EIA-RS-232 Transmitter/Receiver **376** to an EIA-RS-232 port **12**. TX data signals **386** travel from an EIA-RS-232 Transmitter/Receiver to a processor **370**. RX data signals **390** travel from a processor **370** to an EIA-RS-232 Transmitter/Receiver **376**.

A single-ended transmit/receive data signal **398** travels between a processor **370** and an EIA-RS-485 transceiver **378**. A differential transmit/receive data high signal **392** travels between the EIA-RS-485 transceiver **378** and the communications port **12**. A differential transmit/receive data low signal **396** travels between the EIA-RS-485 transceiver **378** and the communications port **12**.

A differential receive/transmit data high signal **400** travels between the communications port **12** and an EIA-RS-485 transceiver **380**. A single-ended receive/transmit data signal **406** travels between the EIA-RS-485 transceiver **380** and the processor **370**. A differential receive/transmit data low signal **404** travels between the communications port **12** and the EIA-RS-485 transceiver **380**.

A single-ended clock signal **414** passes between the processor **370** and an EIA-RS-485 transceiver **382**. A differential clock high signal **408** passes between the EIA-RS-485 transceiver **382** and the communications port **12**. A differential clock low signal **412** travels between the communications port **12** and the EIA-RS-485 transceiver **382**. A Horizontal Sync signal **358** passes from a video switch **324** to a programmable logic

device **364**. A Vertical Sync signal **360** passes from a video switch **324** to a programmable logic device **364**.

Horizontal Sync and Vertical Sync signals **367** pass from a programmable logic device **364** to a Video Driver **420**. On screen menu display data passes over data path **366** from a programmable logic device **364** to a Video Driver **420**.

Red, Green, and Blue video signals **362** pass from a video switch **324** to video driver **420**.

Video driver **420** takes the Red, Green, and Blue video signals **362**, and the Horizontal and Vertical Sync signals **367** and sends Red, Green, Blue, Horizontal Sync, and Vertical Sync signals **422** to video port **10** and Red, Green, Blue, Horizontal Sync, and Vertical Sync signals **424** are sent video port **54**.

Fig. 9 shows a daisy chain cable **440** used to daisy chain multiple control and monitoring systems together. A connector for the communications port and daisy chain **444** and a connector for the communications port and termination **446** comprises one end of the cable. A connector for the communications port and daisy chain **442** and a connector for the communications port and termination **448** comprise the other end of the cable.

Fig. 10 shows a position mapping for each of the connectors of the daisy chain cable **440**. The following tables show the mapping of the positions:

Position on connector for communications port and daisy chain **444**	Description	Position Connection
Position 1 **450**	EIA-RS-485 Tx+	Connector **446** Position 1 **468** and Connector **442** Position 1 **486**
Position 2 **452**	EIA-RS-232 TxD	Connector **446** Position 2 **470**
Position 3 **454**	EIA-RS-232 RxD	Connector **446** Position 3 **472**
Position 4 **456**	EIA-RS-485 Rx-	Connector **446** Position 4 **474** and Connector **442** Position 4 **492**
Position 5 **458**	Ground	Connector **446** Position 5 **476** and Connector **442** Position 5 **494**
Position 6 **460**	EIA-RS-485 Tx-	Connector **446** Position 6 **478** and Connector **442** Position 6 **496**
Position 7 **462**	EIA-RS-485 Clock-	Connector **446** Position 7 **480** and Connector **442** Position 7 **498**
Position 8 **464**	EIA-RS-485 Clock+	Connector **446** Position 8 **482** and Connector **442** Position 8 **500**
Position 9 **466**	EIA-RS-485 Rx+	Connector **446** Position 9 **484** and Connector **442** Position 9 **502**

Position on connector for communications port and daisy chain **442**	Description	Position Connection
Position 1 **486**	EIA-RS-485 Tx+	Connector **448** Position 1 **504** and Connector **444** Position 1 **450**
Position 2 **488**	EIA-RS-232 TxD	Connector **448** Position 2 **506**
Position 3 **490**	EIA-RS-232 RxD	Connector **448** Position 3 **508**
Position 4 **492**	EIA-RS-485 Rx-	Connector **448** Position 4 **510** and Connector **444** Position 4 **456**
Position 5 **494**	Ground	Connector **448** Position 5 **512** and Connector **444** Position 5 **458**
Position 6 **496**	EIA-RS-485 Tx-	Connector **448** Position 6 **514** and Connector **444** Position 6 **460**
Position 7 **498**	EIA-RS-485 Clock-	Connector **448** Position 7 **516** and Connector **444** Position 7 **462**
Position 8 **500**	EIA-RS-485 Clock+	Connector **448** Position 8 **518** and Connector **444** Position 8 **464**
Position 9 **502**	EIA-RS-485 Rx+	Connector **448** Position 9 **520** and Connector **444** Position 9 **466**

Fig. 11 shows a schematic view of a terminator **610** used on the open end of the first and last cables in a daisy chain of multiple control and monitoring systems. A resistor **612** is connected to terminator position 1 **620** and terminator position 6 **630** such that when the terminator **610** is connected to communications port and termination connector **446**, communications port and daisy chain connector **444** position 1 **450** and communications port and daisy chain connector **444** position 6 **460** are terminated. A resistor **614** is connected to terminator position 4 **626** and terminator position 9 **636** such that when terminator **610** is connected to communications port and termination connector **446**, communications port and daisy chain connector **444** position 4 **456** and

communications port and daisy chain connector **444** position 9 **466** are terminated. A resistor **616** is connected to terminator position 7 **632** and terminator position 9 **634** such that when terminator **610** is connected to communications port and termination connector **446**, communications port and daisy chain connector **444** position 7 **462** and communications port and daisy chain connector **444** position 8 **464** are terminated.

Fig. 12A shows a rear view of the terminator and Fig. 12B shows a front view of the terminator. All positions on the front connector of the terminator are connected to each respective position on the rear connector of the terminator in a straight through fashion.

In the preferred embodiment, processors **232, 234, 236, 238, 240, 242, 244, 246, 296,** and **370** are Atmel Corporation model AT89S8252 microcontrollers or equivalent; programmable logic devices **298** and **364** are Xilinx Corporation model XC9536 Complex Programmable Logic Devices (CPLDs) or equivalent; flash memory **308** is Atmel Corporation model AT29C020 or equivalent; NVRAM **302** is Dallas Semiconductor model DS1230AB-70 or equivalent; EIA-RS-232 Transmitter/Receiver **376** is Dallas Semiconductor model DS232 or equivalent;EIA-RS-485 Transceiver **378, 380,** and **382** are Maxim Integrated Products model MAX485 or equivalent.

A floppy disk comprising object code for the programmable logic and the microcontrollers is attached. The following equipment should be used when programming the programmable logic and the microcontrollers:

1) Laptop or PC running Windows (NT, Win95 or Win98) Operating System.
2) Equinox Activ8r Programmer connected to the Laptop or PC's serial port via a serial straight-thru EIA-RS-232 DB9 female to DB9 male cable.
3) A 10 conductor flat ribbon cable to perform in system programming (ISP).
4) Equinox Meridian Suite programming software installed in the laptop or PC.
5) Serial straight-thru EIA-RS-232 DB-9 female to DB-9 male cable to interconnect between the control and monitoring system and the Laptop or PC.

6) Xilinx Foundation F1.5 software installed in the laptop or PC, to use the JTAG programmer program jtagprog.exe.

7) Xilinx Parallel Cable III Model DLC5 that connects to the laptop or PC.

The following procedure should be used in order to program the Programmable Logic, Programmable Logic **298** and **364** should be connected to a 6 pin JTAG connector in order to enable In System Programming from a programming device:

1) Make sure the Xilinx Foundation F1.5's JTAG programmer is properly installed in the laptop or PC and that jtagprog.exe is in the execution path. Open an MSDOS Shell.

2) Connect the DB-25 end of the Xilinx DLC5 Parallel Cable III to the laptop or PC's parallel port.

3) Connect the 6 pin ribbon cable end of the Xilinx DLC5 Parallel Cable III to the Host Controller's Programmable Logic **364** to the 6 pin JTAG connector. Apply power to the control and monitoring system.

4) On the laptop or PC in the MSDOS shell, change directory to the floppy diskette source and execute "proghost". Wait for operations of erase, program and verification of the Host Controller's Programmable Logic **364** and finally for the command prompt.

5) Power down the control and monitoring system and move the 6 pin ribbon cable end of the Xilinx DLC5 Parallel Cable III from the Host Controller's Programmable Logic **364** JTAG header pins to the Main Controller's Programmable Logic **298** JTAG header pins. Apply power to the control and monitoring system.

6) On the laptop or PC in the MSDOS shell, change directory to the floppy diskette source and execute "progmain". Wait for operations of erase, program and verification of the Main Controller's Programmable Logic **298** and finally for the command prompt.

Power down the control and monitoring system and remove the 6 pin ribbon cable end of the Xilinx DLC5 Parallel Cable III from the Main Controller's Programmable Logic **298** JTAG header pins.

The following procedure should be used in order to program the Host Controller, processor **370** should be connected to a 10 pin ISP connector in order to enable In System Programming from a programming device:

1) Connect the Activ8r programmer to the Host Controller, processor **370** to the 10 pin ISP connector via the 10 conductor flat ribbon cable. Be sure to jumper the programmer to use its own external power source, instead of the target's. Apply power to the programmer unit and to the control and monitoring system.
2) Run Meridian programmer software and initialize the programmer hardware via the serial port for flashing the Host Controller, processor **370**. Load into the buffer the AdmCtrl.hex code from the floppy diskette source. Erase the Host Controller, processor **370** and then program it with the data from the program buffer.
3) Power down the control and monitoring system and remove the interconnecting ISP cable.

The following procedure should be used in order to program the Main Controller, processor **296** and Port Controllers, processors **232,234,236, 238,240,242,244**, and **246**:

1) Power up the control and monitoring system. Connect the serial EIA-RS-232 cable between the DB9 serial port **12** and the Laptop or PC's serial port.
2) Insert the source diskette to Laptop or PC, run CPDnld and use it to communicate with the Host Controller, processor **370** via the DB9 serial port **12**.
3) Login with a predetermined password. The following password could be used: "System Administrator".

4) Download to the internal flash EPROM of the Main Controller, processor **296** with the OperDnld.hex code from the floppy diskette source.

(a) To the "?" prompt type "Ctrl]" which will invoke the command mode.

(b) To the "Cmd:" prompt type "d"

(c) To the "Enter filename:" prompt type "a:\OperDnld.hex"

(d) To the "Enter destination (D=OperInternal, E=Port, F= OperFlashEPROM or G=OperNVRAM)" prompt type "D".

(e) After completion of the download process, to the "Cmd:" prompt type "r" to return to terminal mode.

(f) Type Enter key to elicit a "?" prompt from the Administrator software.

5) Download to one of the internal flash EPROM of one of the Port Controllers, processors **232,234,236,238,240,242,244,246** with the PortCtrl.hex code from the floppy diskette source.

(a) To the "?" prompt type "Ctrl]" which will invoke the command mode.

(b) To the "Cmd:" prompt type "d"

(c) To the "Enter filename:" prompt type "a:\PortCtrl.hex"

(d) To the "Enter destination (D=OperInternal, E=Port, F= OperFlashEPROM or G=OperNVRAM)" prompt type "E".

(e) After completion of the download process, to the "Cmd:" prompt type "r" to return to terminal mode.

(f) Type Enter key to elicit a "?" prompt from the Administrator software.

6) Download to the Operation processor's external flash EPROM with the OperCtrl.hex code from the floppy diskette source.

(a) To the "?" prompt type "I" to switch to internal Operation code memory.

(b) To the "?" prompt type "Ctrl]" which will invoke the command mode.

(c) To the "Cmd:" prompt type "d"

(d) To the "Enter filename:" prompt type "a:\OperCtrl.hex"

(e) To the "Enter destination (D=OperInternal, E=Port, F= OperFlashEPROM or G=OperNVRAM)" prompt type "F".

(f) After completion of the download process, to the "Cmd:" prompt type "r" to return to terminal mode.

(g) Type Enter key to elicit a "?" prompt from the Administrator software.

7) Download to the Operation processor's NVRAM with the DefNVRAM.hex code from the floppy diskette source.

(h) To the "?" prompt type "I" to switch to internal Operation code memory.

(i) To the "?" prompt type "Ctrl]" which will invoke the command mode.

(j) To the "Cmd:" prompt type "d"

(k) To the "Enter filename:" prompt type "a:\DefNVRAM.hex"

(l) To the "Enter destination (D=OperInternal, E=Port, F= OperFlashEPROM or G=OperNVRAM)" prompt type "G".

(m) After completion of the download process, to the "Cmd:" prompt type "r" to return to terminal mode.

(n) Type Enter key to elicit a "?" prompt from the Administrator software.

7) Reset the control and monitoring system by powering down and then waiting for a few seconds before powering up and the unit should be ready to operate for its designed function.

Operation of Invention

Each computer to be controlled and monitored is connected to the control and monitoring system via a Keyboard-Video-Mouse (KVM) Cable **100**. A keyboard connector **106** plugs into the keyboard port of the computer to be controlled and monitored. A mouse connector **108** plugs into the mouse port of the computer to be controlled and monitored. A video connector **104** plugs into the video port of the computer to be controlled and monitored. A KVM connector **102** plugs into one of the KVM ports **20**, **22**, **24**, **26**, **28**, **30**, **32**, **34**, **36**, **38**, **40**, **42**, **44**, **46**, **48**, **50**.

The processor **296** communicates with the processor **370** via the data path **320**. The processor **370** can also communicate with a computer

attached to the communications port **12** via a modem cable or via a null modem cable and a modem. The processor **370**, also known as the Host Controller, also looks for EIA-RS-232 Receive Data signals **386** coming from the EIA-RS-232 Transmitter/Receiver **376** and passes the Receive Data signal **390** to the processor **370**. The processor **370** can send acknowledgements or other data via EIA-RS-232 Transmit Data signal **386** to the EIA-RS-232 Transmitter/Receiver 376 which then passes EIA-RS-232 Transmit Data signals **384**.

The computer attached to communications port **12** may transmit any of several commands, including but not limited to:

- Print the available commands menu
- Login and establish an administration (admin) session
- Logout from admin session
- Reset the entire system
- Read current configuration settings
- Set configuration settings
- Switch operating software between internal flash memory on the processor **296** and flash memory **308**.
- Perform diagnostic tests
- Set local options
  - Select the Port Controllers that will be active in subsequent operations of erase, program, and upload.
- Switch the execution of processor **296** (also known as the Main Controller) between internal flash memory and flash memory **308**
- Erase internal flash memory on the processor **296**, flash memory **308**, or any or all of the Port Controllers' flash memory.
- Download code and data and program internal flash memory on the processor **292**, flash memory **308**, or for any or all of the Port Controllers' flash memory.
- Download code and data to NVRAM **302**
- Upload code and data from flash memory of processor **292**, flash memory **308**, or any or all of the Port Controllers' flash memory.
- Upload code and data from NVRAM **302**
- Turn LCD +12V power on and off

- Turn Debug LED on and off
- Send commands and/or data to processor **296** (also known as the Main Controller)
- Get status and/or data from processor **296** (also known as the Main Controller)
- Submit any of the above to another control and monitoring system connected to communications port **12** via at least one daisy chain cable **440**.

Once the Host Controller receives one of the above commands it processes it and looks for more commands from the remote computer communicating through the communications port **12**.

Red, Green, Blue, Horizontal Sync, and Vertical Sync (RGBHV) Signals **326**, **328**, **330**, **332**, **334**, **336**, **338**, **340**, **342**, **344**, **346**, **348**, **350**, **352**, **354**, **356** are received by the video switch **324**. A video select signal **322** causes the video switch **324** to pass Red, Green, and Blue video signals **362** to a video driver **420**. The video select signal **322** also causes the video switch **324** to pass Horizontal and Vertical Sync signals to a Programmable Logic **364**.

The processor **370**, also known as the Host Controller, takes the local Horizontal Sync generated by Programmable Logic **364,** generates the local Vertical Sync and passes to the Programmable Logic **364.** The processor **296**, also known as the Main Controller passes data over the data path **366** for on screen menu display to the video driver **420**. Red, Green, and Blue video signals are overlaid with on screen menu display data, if any, and a set of amplified Red, Green, Blue, Horizontal Sync, and Vertical Sync video signals **422** are sent to video port **10**. A set of amplified Red, Green, Blue, Horizontal Sync, and Vertical Sync video signals **424** are sent to video port **54**.

The processor **296**, also known as the Main Controller also checks to see if Vertical Sync signal **358** and Horizontal Sync signal **360** are being provided by one of the remote computers through the video switch **324**. If there are no such signals, the Main Controller enables the local Vertical Sync and Horizontal Sync signals and passes Horizontal Sync and

Vertical Sync signals **367** and instructs programmable logic device **364** to pass said signals to the video driver **420**.

The processor **370** also communicates with other Host Controllers on other control and monitoring units via a daisy chain cable **440** connected to the communications port **12** of each control and monitoring unit.

The processor **296**, also known as the Main Controller controls and monitors eight processors **232, 234, 236, 238, 240, 242, 244, 246**. The Programmable Logic **298** provides the processor **296** with code for being able to communicate with the processor **370** and also the other eight processors **232**, **234**, **236**, **238**, **240**, **242**, **244**, **246**.

The Main Controller looks for and processes commands from the Host Controller. Commands coming from the Host Controller include but are not limited to:

- Get the current status
- Perform the following diagnostic tests:
  - Select video port 1-16 through the video switch
  - Enable and disable video port
  - Turn on and off Horizontal Sync and Vertical sync
  - Enable and disable video driver
  - Show graphics window while measuring the horizontal sync and vertical sync signals
- Download code and data and program the flash memory **308** or NVRAM **302**
- Upload code and data from flash memory **308** or NVRAM **302**
- Erase flash memory **308**
- Verify code in flash memory **308**
- Turn LCD +12V power on and off
- Turn Debug LED on and off
- Echo data back

The Main Controller also performs the following tasks as dictated by the program loaded from flash memory **308**:

- Presents the selected port number or system name associated with the port number on the display **68**

- As keyboard signals **316** and mouse signals **318** are received into processor **296**, the Main Controller detects such a condition and does the following:
    - Reads the keyboard and mouse data
    - Checks to see if the menu entry key has been typed. The menu entry key is a predetermined character sequence. For example, either the "Print Screen" or "Pause" keys could be used to trigger the on screen menu. Other keys to invoke the on screen menu may also be designated by a human user.
    - If the menu entry key has not been typed, the keyboard and mouse data is passed to the currently selected KVM port through the appropriate Port Controller.
    - If the menu entry key has been typed, the Main Controller performs the following:
        - Set currently selected port to DESELECTED to Port Controller
        - Present a Main menu on screen
        - Process the Main menu commands in the following manner until an exit or cancel command or a timeout is received:
            - Present the selected port number on screen
            - Look for a menu command
            - If an Exit command or a timeout is received then
                - Re-initialize the keyboard **72** and the touchpad **70** to the currently selected port states. For example, the state of the mouse scaling and resolution.
                - Re-initialize any keyboard attached to keyboard port **14** to the currently selected port states. For example, the state of "Num Lock" or "Caps Lock".
                - Re-initialize any pointing device attached to mouse port **16** to the currently selected port states.
            - Remove the menu from the screen and show the currently selected port's video.
            - If a Set Selected Port command is received then the user is allowed to select a port using the number keys, function keys, or cursor keys on the keyboard and then confirm the selection with the Enter key on the keyboard. The state of the selected port is set to SELECTED and it

informs the associated Port Controller and the Exit command is processed as described above.

- If an About command is received then show company's current information, version, and copyright information and wait for Main menu or Exit commands. If the Main menu command is received then return to the Main menu. If the Exit command is received then process it as described above.
- If a Detail command is received then show information for the first eight KVM ports **20, 22, 24, 26, 28, 30, 32,** and **34**. Information includes the port number, name associated with the port, and whether the port is marked ACTIVE or INACTIVE. The menu code then waits for a command and processes it as follows:
  - If the Main menu command is received the Main menu is displayed.
  - If the Exit command or a timeout is received it is processed as described above.
  - If a Next command is received then show information for the next eight KVM ports **36, 38, 40, 42, 44, 46, 48,** and **50**. Information includes the port number, name associated with the port, and whether the port is marked ACTIVE or INACTIVE. Then menu code then waits for a command and processes it as follows:
    - If the Main menu command is received the Main menu is displayed.
    - If the Exit command is received it is processed as described above.
    - If a Previous command is received it is processed as the Detail command described above.
- If a Setup command is received then process commands in the following manner:
  - Disable timeout on waiting for input
  - Display the Setup menu
  - If an Exit command is received then process it as described above

- If a Discard Setup command is received then return to the Main menu without saving any changes.
- If an Edit Ports 1-8 command is received then display information about KVM ports **20, 22, 24, 26, 28, 30, 32,** and **34** and allow the user to type in a system name and description associated with the port using the arrow keys and character keys. If a Previous command is selected with the arrow keys or page up key then return to the Setup menu. If an Exit command is selected process it as described above.
- If an Edit Ports F1-F8 command is received then display information about KVM ports **36, 38, 40, 42, 44, 46, 48,** and **50** and allow the user to type in a system name and description associated with the port using the arrow keys and character keys. If a Previous command is selected with the arrow keys or page up key then return to the Setup menu. If an Exit command is selected process it as described above.

- If a Save Setup command is received then request the user to enter the password. If the password matches the currently saved password then update and save the settings to flash memory **308** and return to Main menu. If the password does not match then return to the Setup menu.
- If a Change Password command is received then request the user to enter the currently saved password. If the password does not match then return to the Setup menu. If the password matches the saved password then allow the user to enter a new password twice. If the two new passwords match then save it to flash memory **308** and return to the Main menu. If the two new passwords do not match then repeat the Change Password process.

- Polls the Port Controller for the selected port for new changes in keyboard and mouse states and status.

    - If new keyboard states and status are available from the KVM port they are sent to the keyboard **72** and the external keyboard port **14**.
    - If new mouse states and status are available from the KVM port they are sent to the touchpad **70** and the external mouse port **16**.
- If no keyboard or mouse "connected" signals are detected from the KVM port for a specified period of time then the Port Controller will mark the port INACTIVE and return such status. Poll the Port Controller for ports marked as ACTIVE ports
    - If new states and status are available then update the states of the port and mark it as ACTIVE
    - If no keyboard or mouse "connected" signals are detected from the KVM port for a specified period of time then that port is marked INACTIVE
- Poll the Port Controller for ports marked as INACTIVE ports
    - If keyboard or mouse "connected" signals are detected from the KVM port for a specified period of time then mark the status for the port as ACTIVE
    - If no keyboard or mouse "connected" signals are detected from the KVM port for a specified period of time then keep the status for the port as INACTIVE

Any of the eight processors **232**, **234**, **236**, **238**, **240**, **242**, **244**, **246** are also known as a Port Controller.

Each Port Controller sends and receives keyboard and mouse data between the Main Controller and each of two KVM ports. Each Port Controller performs the following tasks in a loop:

- Check for keyboard or mouse data from the Main Controller
- If the keyboard or mouse data is for one of the two KVM ports connected to the Port Controller then send the keyboard and mouse data through the appropriate KVM port.
- Check for a request for status from the Main Controller
- If a request for status from the Main Controller is received then send the keyboard or mouse states and the status of either ACTIVE or INACTIVE for the KVM port to the Main Controller.
- Check for keyboard or mouse data from the KVM ports

- If there is keyboard or mouse data from the KVM ports then process it, save the state such as Num Lock, Caps Lock and send the appropriate responses back through the KVM ports. Such states are sent back to the keyboard or mouse on the next poll from the Main Controller.
- Poll to see if there is a computer that is asserting the keyboard and mouse "connected" signals going to each of the two KVM ports. If there is a connection within a specified period of time then mark the port as ACTIVE. If there is no connection within a specified period of time then mark the port as INACTIVE.

Multiple control and monitoring systems may be daisy chained together. The first control and monitoring system is designated as a Master System. Each additional control and monitoring system is referred to as a Slave System. A connector for communications port and daisy chain **444** of a daisy chain cable **440** plugs into the communications port **12** of the Master System. A connector for communications port and daisy chain **442** plugs into the communications port **12** of a Slave System. Additional slave systems are added by connecting a connector for communications port and daisy chain **444** of an additional daisy chain cable **440** into the connector for communications port and termination **448** of a Slave System at the end of the daisy chain and plugging the connector for communications port and daisy chain **442** of the communications cable **440** into the communications port **12** of the Slave System to be added. The first and last daisy chain cable in the daisy chain requires a terminator **610** on the communications port and termination connector **446** or **448**. A KVM Cable **100** also connects each Slave System to the Master System. The keyboard connector **106** is plugged into the external keyboard port **14** of a Slave System. The mouse connector **108** is plugged into the external mouse port **16** of the Slave System. The video connector **104** is plugged into the external video port **10** of the Slave System. The KVM connector **102** plugs into one of the KVM ports **20**, **22**, **24**, **26**, **28**, **30**, **32**, **34**, **36**, **38**, **40**, **42**, **44**, **46**, **48**, **50** of the Master System.

The Master System and Slave Systems communicate over the daisy chain cables **440** using the Serial Peripheral Interface (SPI) protocol as documented in "Microcontroller Data Book, AT86 Series" published December 1997 by Atmel Corporation. The MOSI signal called out in the data book is seen here as an RS-485 Tx signal pair (Tx+, Tx-). The MISO signal called out in the data book are seen here as the RS-485 Rx signal pair (Rx+,Rx-). The SCK signal called out in the data book is seen here as the RS-485 Clock signal pair (Clock+,Clock-).

The Master System uses the single-ended Transmit/Receive Data signal **398** to transmit data via EIA-RS-485 Transceiver **378**. The EIA-RS-485 Transceiver **378** transmits data to Slave Systems using the Differential Transmit/Receive Data High signal **392** and the Differential Transmit/Receive Data Low signal **396**.

A Slave System uses the single-ended Transmit/Receive Data signal **398** to receive data via EIA-RS-485 Transceiver **378**. The EIA-RS-485 Transceiver **378** receives data from the Master System using the Differential Transmit/Receive Data High signal **392** and the Differential Transmit/Receive Data Low signal **396**.

The Master System uses the single-ended Receive/Transmit Data signal **406** to receive data via EIA-RS-485 Transceiver **380**. The EIA-RS-485 Transceiver **380** receives data from Slave Systems using the Differential Receive/Transmit Data High signal **400** and the Differential Receive/Transmit Data Low signal **404**.

A Slave System uses the single-ended Receive/Transmit Data signal **406** to transmit data via EIA-RS-485 Transceiver **380**. The EIA-RS-485 Transceiver **380** transmits data to the Master System using the Differential Receive/Transmit Data High signal **400** and the Differential Receive/Transmit Data Low signal **404**.

The Master System uses the single-ended Clock signal **414** to transmit a clock signal to an EIA-RS-485 Transceiver **382**. The EIA-RS-485 Transceiver **382** transmits a differential clock signal to a Slave System using the Differential Clock High signal **408** and the Differential Clock Low signal **412**.

A Slave System receives a single-ended clock signal from the EIA-RS-485 Transceiver **382** through the Clock signal **414**. The EIA-RS-485

Transceiver **382** receives a differential clock signal from the Master System through the Differential Clock High signal **408** and the Differential Clock Low signal **412**.

The Master System and Slave Systems communicate with each other through cascade signals using the SPI protocol. The Master System is always in control and through one of its KVM ports **20**, **22**, **24**, **26**, **28**, **30**, **32**, **34**, **36**, **38**, **40**, **42**, **44**, **46**, **48**, **50** it can display the video from a Slave System port **10** and control the keyboard port **14** and mouse port **16** of the Slave System. Switching KVM ports in the Master System is equivalent to switching groups of computers, each group of computers being attached to a Slave System. The control menu in the Master System allows the switching and selection of one of the KVM ports **20**, **22**, **24**, **26**, **28**, **30**, **32**, **34**, **36**, **38**, **40**, **42**, **44**, **46**, **48**, **50**, each of which could represent KVM ports **20**, **22**, **24**, **26**, **28**, **30**, **32**, **34**, **36**, **38**, **40**, **42**, **44**, **46**, **48**, **50** on a Slave System or a combination of groups of computers and individual computers. Once a group is selected the Master System can use cascade signals to command the group associated with the Slave System to display its port selection and allow a specific KVM port on the Slave System to be connected. The process described saves an additional step of having to first select a KVM port on the Master System and then select a KVM port on the Slave System. The use of cascade signals also provides a way to transfer configuration and operational state information from Slave Systems to the Master System for improved user interface and quick access to each KVM port's status information. Thus, the combination of Master Systems and Slave Systems appear to function as one large control and monitoring system.

Additional Embodiments

An additional embodiment is one where the control and monitoring system may be mounted vertically on the side of a rack instead of being mounted horizontally in the rear of a rack.

Another embodiment utilizes the keyboard-video-mouse switch and a plurality of keyboard-video-mouse cables without the keyboard, pointing device, and video display. Such an embodiment would allow connection to other keyboard-video-mouse switches in a tiered fashion whereby a video

display output port of a first keyboard-video-mouse switch is connected to a video display input port of a second keyboard-video-mouse switch, a keyboard input port of the first keyboard-video-mouse switch is connected to a keyboard output port of the second keyboard-video-mouse switch, and a mouse input port of the first keyboard-video-mouse switch is connected to a mouse output port of the second keyboard-video-mouse switch. In addition the cascade signals between the Systems would improve the user interface of the controlling Master system with the video display, keyboard and mouse devices.

Alternative Embodiments

An alternative embodiment comprises processor equivalents such as Central Processing Units (CPUs) instead of processors.

There are various possibilities with regard to the pointing device and video display. The pointing device could be a trackball, graphics tablet, joystick, or mouse. The video display and pointing device could be combined into a touchscreen device.

Another alternative embodiment comprises a KVM switch capable of being daisy chained such that a plurality of interconnected KVM switches appears to be a single switch with more ports than a single KVM switch to a human user.

Advantages

From the description above, a number of advantages of the control and monitoring system become evident:

Rack space required for video display, character input, and pointing device is kept to a minimum.

The number of separate connectors required to connect a system to a KVM switch is reduced from three (3) to one (1), reducing the likelihood of a failure due to a loose connection caused by stress on an individual cable.

The video display, character input device, and pointing device of the control and monitoring system may extend out of a rack as a single unit. Traditional solutions to control and monitor multiple computer

systems require a human user to extend a keyboard drawer. The video display in such solutions had to be extended separately or mounted flush with the rack and consuming valuable vertical rack space. Alternatively, a video display attached to a keyboard drawer by a hinge could be extended out of a rack with a keyboard and pointing device but consumed 2U (3.50 inches) of vertical rack space.

An external control port on the opposite side allows a second video display, character input device, and pointing device to be connected to the control and monitoring system. This is useful in a trade show environment where a computer video display output may be sent to a video projection system or line driver and a remote control device may be used to control character input or pointing input or both character input and pointing input.

A plurality of control and monitoring systems may be daisy chained together in a tiered fashion whereby a human user may access multiple control and monitoring systems as well as the systems connected to the control and monitoring systems from a single control and monitoring system. Traditional KVM switches may be daisy chained but the number of KVM switches that may be connected is limited.

The control and monitoring system may switch off power to the video display after a period of time has elapsed, reducing power consumption and thermal emissions when the control and monitoring system has not been utilized for a specified period of time.

A minimum of one processing unit for every two ports on the control and monitoring system allows the control and monitoring system to sample each computer connected to the control and monitoring system for video display independent of the other ports on the control and monitoring system, reducing the likelihood of losing data at a critical time. Another processor reduces the likelihood of losing character input or pointing input to the control and monitoring system from a human user by independently sampling for character input and pointing input.

The video display, character input device, and pointing device are protected from dust and impact from objects when the control and monitoring system is in the closed position.

No special software or hardware is required to be installed on the computer that is being controlled, other than a cable which has a single

connector on one end and connectors for video display, character input, and pointing input on the other end.

CONCLUSION, RAMIFICATIONS, AND SCOPE OF INVENTION

Accordingly, the reader will see that the control and monitoring system of this invention allows a user to apply input to and view the video display output of multiple computer systems. Loss of data is prevented by utilizing multiple processors to handle keyboard and mouse signals and to pass video signals through a video switch. The control and monitoring system may be restarted by a remote operator or have its programming downloaded or uploaded to a remote computer system, easing the job of troubleshooting and maintenance of upgrades. The control and monitoring system consumes a minimum of space by removing the need for separate mini-DIN connectors for keyboard and mouse signals on the control and monitoring system side and using a single fifteen position D-sub connection for keyboard, mouse, and video display signals. Furthermore, the control and monitoring system has the additional advantages of:

(a) allowing more than the eight (8) systems currently allowed by current keyboard-video-mouse (KVM) switches while consuming the same amount of vertical rack space as a conventional KVM switch;

(b) providing a video display, a character input device, and a pointing device which consumes a minimum of vertical rack space;

(c) allowing connection to other control and monitoring systems in a tiered fashion so more than sixteen (16) systems may be controlled and monitored.

Although the description above contains many specificities, these should not be construed as limiting the scope of the invention but as merely providing illustrations of some of the presently preferred embodiments of this invention. For example, the control and monitoring system can use more processors; more than sixteen (16) ports could be used; a different pointing device could be used, etc. Thus the scope of the invention should be determined by the appended claims and their legal equivalents, rather than by the examples given.

CLAIMS

What is claimed:

1. A control and monitoring system, comprising:
   (a) a keyboard-video-mouse switch means; and
   (b) a plurality of keyboard-video-mouse cables each of which connects to one of a plurality of computers to be controlled and monitored, the improvement wherein each of said plurality of keyboard-video-mouse cables comprises:
      (i) a first connector, for connecting into a keyboard connection of one of said plurality of computers; and
      (ii) a second connector, for connecting into a mouse connection of one of said plurality of computers; and
      (iii) a third connector, for connecting into a video display port of one of said plurality of computers; and
      (iv) a fourth connector, for connecting into said keyboard-video-mouse switch means; and
      (v) a first cable means connecting said fourth connector to said first connector, said second connector, and said third connector, for carrying keyboard signals, mouse signals, and red, green, blue, vertical sync and horizontal sync video display signals,

   whereby each of said plurality of improved keyboard-video-mouse cables carries keyboard signals, mouse signals, and red, green, blue, vertical sync, and horizontal sync video signals between each of said plurality of computers and said keyboard-video-mouse switch means.

2. A control and monitoring system comprising:
   (a) a keyboard-video-mouse switch means; and
   (b) an improved administration station, the improvement comprising:
      (i) a display, for connecting to said keyboard-video-mouse switch means; and
      (ii) a first housing including said display; and

(iii) a character input means, for connecting to said keyboard-video-mouse-switching means; and

(iv) a pointer means, for connecting to said keyboard-video-mouse switch means; and

(v) a second housing including said character input means and said pointer means such that said character input means and said pointer means may be used by said human operator; and

(vi) said first housing which is rotatably connected to said second housing such that said operator may lay said first housing against said second housing and also swing said first housing away from said second housing,

whereby a human operator can store said first housing and said second housing in a minimum of vertical rack space when the improved administration station is not in use and is able to position said display and said character input means and said pointer means such that said operator can use said character input means to transmit commands and data to said keyboard-video-mouse switch means in the form of a series of characters and use said pointer means to point to any location on said display and be able to view said display.

3. The system of claim 2 wherein said improved administration station is in slidable communication with said keyboard-video-mouse switch means whereby a human operator may slide said improved administration station toward said human operator and away from said third housing such that said human operator may rotate said first housing away from said second housing and view said display, enter character input, and point to any location on said display.

4. A control and monitoring system comprising:

(a) a plurality of processor means for processing keyboard and mouse signals from said plurality of computers; and

(b) a plurality of clock signal generators, one of each connected to said plurality of processor means, for driving each of said plurality of processor means; and

(c) a first processor means connected to each of said plurality of processor means, for passing keyboard signals between a character input means and one of said plurality of processor means and mouse signals between a pointer means and one of said plurality of processor means; and

(d) a first clock generator connected to said first processor means connected to each of said plurality of processor means; and

(e) a first programmable logic means connected to said first processor means; and

(f) a non-volatile random access memory connected to said first processor means and to said first programmable logic means; and

(g) a flash memory connected to said first processor means; and

(h) a video driver means connected to said second programmable logic means and to a first processor means, for displaying a onscreen menu or a set of video signals from one of a plurality of computers; and

(i) a video switch means connected to said first processor means, for receiving a plurality of red, green, blue, horizontal and vertical sync video signals from said plurality of computers and passing said red, green, blue, horizontal and vertical sync video signals to said video driver means.

5. The system of claim 4 wherein said video driver means comprises:

(a) an on screen graphics display circuit, for generating text and graphics for an on screen menu; and

(b) an on screen graphics overlay circuit coupled to said on screen graphics display circuit and said video switch means; and

(c) a first plurality of op-amp amplifying circuits coupled to said on screen graphics overlay circuit, one each for each

of a plurality of red video signals from said on screen graphics overlay circuit; and

(d) a second plurality of op-amp amplifying circuits coupled to said on screen graphics overlay circuit, one each for each of a plurality of green video signals from said on screen graphics overlay circuit; and

(e) a third plurality of op-amp amplifying circuits coupled to said on screen graphics overlay circuit, one each for each of a plurality of blue video signals from said on screen graphics overlay circuit; and

(f) a first signal splitting circuit coupled to said video switch means, for passing a plurality of vertical sync signals from said second programmable logic means; and

(g) a second signal splitting circuit coupled to said video switch means, for passing a plurality of horizontal sync signals from said second programmable logic means,

whereby a plurality of video display devices may be sent video signals of sufficient strength to drive said plurality of video display devices.

6. The system of claim 4 wherein said first processor means comprises a microcontroller.

7. The system of claim 4 wherein said plurality of processor means comprises a plurality of microcontrollers.

8. The system of claim 4 further comprising:

(a) a second processor means connected to said first processor means, for uploading and downloading programming and data and processing commands from a remote computer; and

(b) a second clock signal generator connected to said second processor means, for driving said second processor means; and

(c) a second programmable logic means connected to said second processor means, said video switch means, and said video driver means; and

(d) a communication means connected to said second processor means, for providing commands, programming, and data to said second processor means from said remote computer,

whereby said remote computer may send commands and upload and download programming and data to said first processor means.

9. The system of claim 8 wherein said second processor means comprises a microcontroller.

10. The system of claim 4 further comprising a first plurality of connectors, each of which comprises:

(a) a first set of positions connected to one of said plurality of processor means, for passing keyboard and mouse signals between one of said plurality of computers and one of said plurality of processor means; and

(b) a second set of positions connected to said video switch means, for passing red, green, blue, vertical sync, and horizontal sync video signals between one of said plurality of computers and said video switch means,

whereby a single connector is used for keyboard signals, mouse signals, and red, green, blue, vertical sync, and horizontal sync video signals.

11. The system of claim 4 wherein said first programmable logic means comprises a Complex Programmable Logic Device.

12. The system of claim 8 where said second programmable logic means comprises a Complex Programmable Logic Device.

13. The system of claim 8 wherein each of said first plurality of connectors comprises a fifteen position D-sub connector.

14. The system of claim 8 wherein said communication means comprises:

(a) an EIA-RS-232 Transmitter/Receiver connected to said second processor means for receiving data and transmitting data between said second processor means and a remote computer, whereby said second processor means receives commands, programming, and data from said remote computer and transmits programming and data to said remote computer.

15. A control and monitoring system comprising:

(a) a first keyboard-video-mouse switch means; and

(b) at least one second keyboard-video-mouse switch means; and

(c) a first EIA-RS-485 Transceiver coupled to said first keyboard-video-mouse switch means for transmitting and receiving differential data signals between said first keyboard-video-mouse switch means and said second keyboard-video-mouse switch means; and

(d) a second EIA-RS-485 Transceiver coupled to said first keyboard-video-mouse switch means for receiving and transmitting differential data signals between said first keyboard-video-mouse switch means and said second keyboard-video-mouse switch means; and

(e) a third EIA-RS-485 Transceiver coupled to said first keyboard-video-mouse switch means for asserting and receiving differential clock signals between said first keyboard-video-mouse switch means and said second keyboard-video-mouse switch means; and

(f) a fourth EIA-RS-485 Transceiver coupled to said second keyboard-video-mouse switch means for transmitting and receiving differential data signals between said second keyboard-video-mouse switch means and said first keyboard-video-mouse switch means; and

(g) a fifth EIA-RS-485 Transceiver coupled to said second keyboard-video-mouse switch means for receiving and transmitting differential data signals between said second keyboard-video-mouse switch means and said first keyboard-video-mouse switch means; and

(h) a sixth EIA-RS-485 Transceiver coupled to said second keyboard-video-mouse switch means for asserting and receiving differential clock signals between said second keyboard-video-mouse switch means and said first keyboard-video-mouse switch means; and

(i) a daisy chain cable means connected to said first keyboard-video-mouse switch means on one end and each of said second keyboard-video-mouse switch means on the other end,

whereby a plurality of control and monitoring systems may communicate with each other.

16. The system of claim 15 wherein said daisy chain cable means comprises:

(a) a fifth connector, for connecting into said first keyboard-video-mouse switch means; and

(b) a sixth connector, for connecting a terminator or communications cable for a computer; and

(c) a seventh connector, for connecting into said second keyboard-video-mouse switch means; and

(d) a eighth connector, for connecting into said fifth connector of another daisy chain cable or a terminator; and

(e) a cable means connecting said fifth connector to said sixth connector and to said seventh connector,

whereby a plurality of control and monitoring systems may be daisy chained together.

17. The system of claim 10 further comprising:

(a) a second plurality of connectors connected to said video driver, for a plurality of video display means viewable by a human operator; and

(b) a third plurality of connectors connected to said second processor means, each of said third plurality of connectors may be connected to one of a plurality of character input

means which said human operator can use to send a series of characters to said second processor means; and

(c) a fourth plurality of connectors connected to said second processor means, each of said fourth plurality of connectors may be connected to one of a plurality of pointer means which said operator can manipulate to point to any location on said plurality of video display means.

18. A method for controlling and monitoring a plurality of computer systems, comprising the steps of:

(a) providing a plurality of keyboard-video-mouse (keyboard-video-mouse) cables, each of which is capable of being connected to the keyboard, video, and mouse connections of a computer to be controlled and monitored; and

(b) providing at least one keyboard-video-mouse port; and

(c) providing a plurality of processor means, each of which is connected to at least one keyboard-video-mouse port; and

(d) providing a first processor means coupled to each of said plurality of processor means; and

(e) providing a keyboard connected to said first processor means; and

(f) providing a pointing device connected to said first processor means; and

(g) providing a video display connected to said first processor means; and

(h) providing a video switch controlled by said first processor means; and

(i) selecting one of said keyboard-video-mouse ports and therefore one of said plurality of processor means; and

(j) receiving keyboard and mouse signals from at least one of said keyboard-video-mouse ports; and

(k) transmitting keyboard and mouse signals from selected one of said plurality of processor means to said first processor means; and

(l) receiving keyboard signals from said keyboard into said first processor means; and

(m) receiving mouse signals from said pointing device into said first processor means; and

(n) transmitting keyboard and mouse signals from said first processor means to selected one of said plurality of processor means; and

(o) transmitting keyboard and mouse signals from selected one of said plurality of processor means to selected keyboard-video-mouse port; and

(p) receiving video signals from at least one of said keyboard-video-mouse ports into said video switch; and

(q) directing first processor means to cause said video switch to pass video signals from selected keyboard-video-mouse port to said video display.

19. The method of claim 18 further comprising the steps of:

(a) providing a communications port; and

(b) providing a computer connected to said communications port; and

(c) providing a second processor means coupled to said communications port; and

(d) transmitting commands and data from said computer connected to said communications port into said second processor means; and

(e) directing said second processor means to execute commands received from said computer connected to said communications port.

20. The method of claim 18 further comprising the steps of:

(a) providing a communications port; and

(b) providing a computer connected to said communications port; and

(c) providing a second processor means coupled to said communications port; and

(d) providing a non-volatile random access memory (NVRAM) coupled to said first processor means; and

(e) transmitting commands and data from said computer connected to said communications port into said second processor means; and

(f) directing said second processor means to load programming into itself and store said programming into said flash memory or NVRAM; and

(g) directing said second processor means to cause said plurality of processor means to load programming into themselves.

21. A method for controlling and monitoring a plurality of computer systems, comprising the steps of:

(a) providing a first EIA-RS-485 Transceiver; and

(b) providing a second EIA-RS-485 Transceiver; and

(c) providing a third EIA-RS-485 Transceiver; and

(d) providing a first communications port coupled to said first EIA-RS-485 Transceiver, said second EIA-RS-485 Transceiver, and said third EIA-RS-485 Transceiver; and

(e) providing a first keyboard-video-mouse switch means coupled to said first communications port; and

(f) providing a fourth EIA-RS-485 Transceiver; and

(g) providing a fifth EIA-RS-485 Transceiver; and

(h) providing a sixth EIA-RS-485 Transceiver; and

(i) providing a second communications port coupled to said fourth EIA-RS-485 Transceiver, said fifth EIA-RS-485 Transceiver, and said sixth EIA-RS-485 Transceiver; and

(j) providing a second keyboard-video-mouse switch means coupled to said second communications port; and

(k) providing a daisy chain cable connecting said first communications port to said second communications port; and

(l) directing said first keyboard-video-mouse switch means to cause data to be transmitted via a differential transmit data signal from said first keyboard-video-mouse switch means to said second keyboard-video-mouse switch means through said first EIA-RS-485 Transceiver; and

(m) directing said first keyboard-video-mouse switch means to drive said differential transmit data signal with a differential clock signal from said third EIA-RS-485 Transceiver; and

(n) receiving data into said second keyboard-video-mouse switch means from said first keyboard-video-mouse switch means via a differential receive data signal through said fourth EIA-RS-485 Transceiver; and

(o) directing said second keyboard-video-mouse switch means to transmit data to said first keyboard-video-mouse switch means via a differential transmit data signal through said fifth EIA-RS-485 Transceiver; and

(p) receiving data into said first keyboard-video-mouse switch means from said second keyboard-video-mouse switch means via a differential receive data signal through said second EIA-RS-485 Transceiver.

Express Mail Label Number EJ130610082US

ABSTRACT OF THE DISCLOSURE

A SYSTEM AND METHOD FOR REMOTELY CONTROLLING AND MONITORING A PLURALITY OF COMPUTER SYSTEMS

Abstract: A control and monitoring system for a plurality of computer systems having a first processor means (**296**), a plurality of processor means (**232, 234, 236, 238, 240, 242, 244, 246**); a plurality of keyboard-video-mouse cables (**100**) each comprising a single connector (**102**) on one end and on the other end a connector for video (**104**, a connector for keyboard signals (**106**), a connector for mouse signals (**108**); a video display (**68**); a keyboard (**72**), and a pointing device (**74**). The video display (**68**) is enclosed in a first housing (**69**). The keyboard (**72**), and pointing device (**74**) are enclosed in a second housing (**70**) rotatably connected to the first housing (**69**). Each of a plurality of Keyboard-Video-Mouse Ports (**20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50**) comprises a single fifteen position D-sub connector through which keyboard, mouse, and video signals pass for each computer system connected to a keyboard-video-mouse switch. Local horizontal and vertical sync signals are generated when external syncs are absent for display of onscreen menus. The first processor means (**296**) accepts keyboard and mouse input for onscreen menu programming or passes keyboard and mouse data to the specified computer system. A second processor means (**370**) accepts commands, uploads, or downloads programming for the system through a communications port (**12**). Multiple control and monitoring systems may be daisy chained together where a first control and monitoring system acts as a master system and other control and monitoring systems are slave systems.

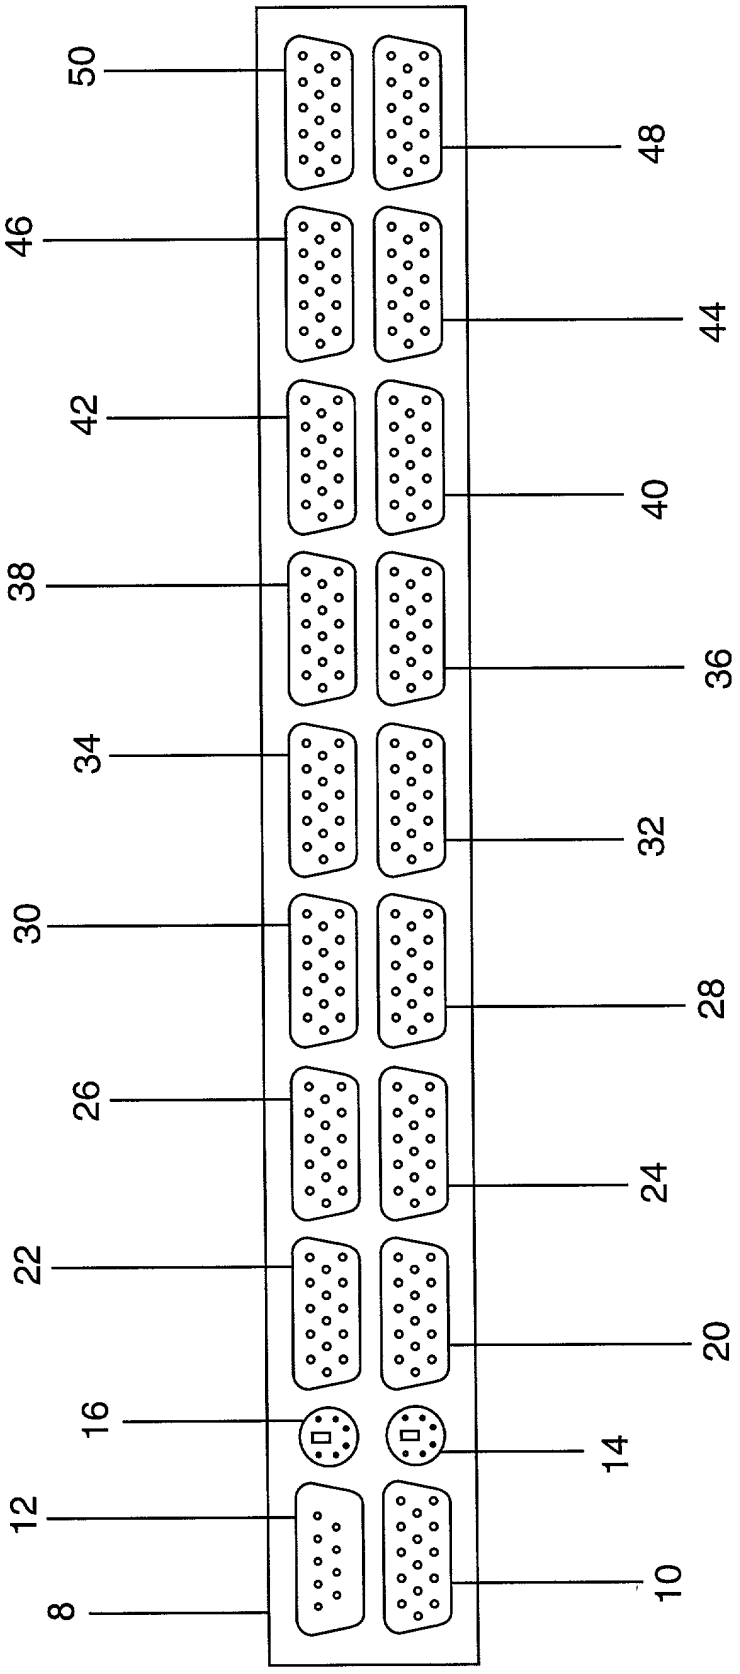

FIG. 1

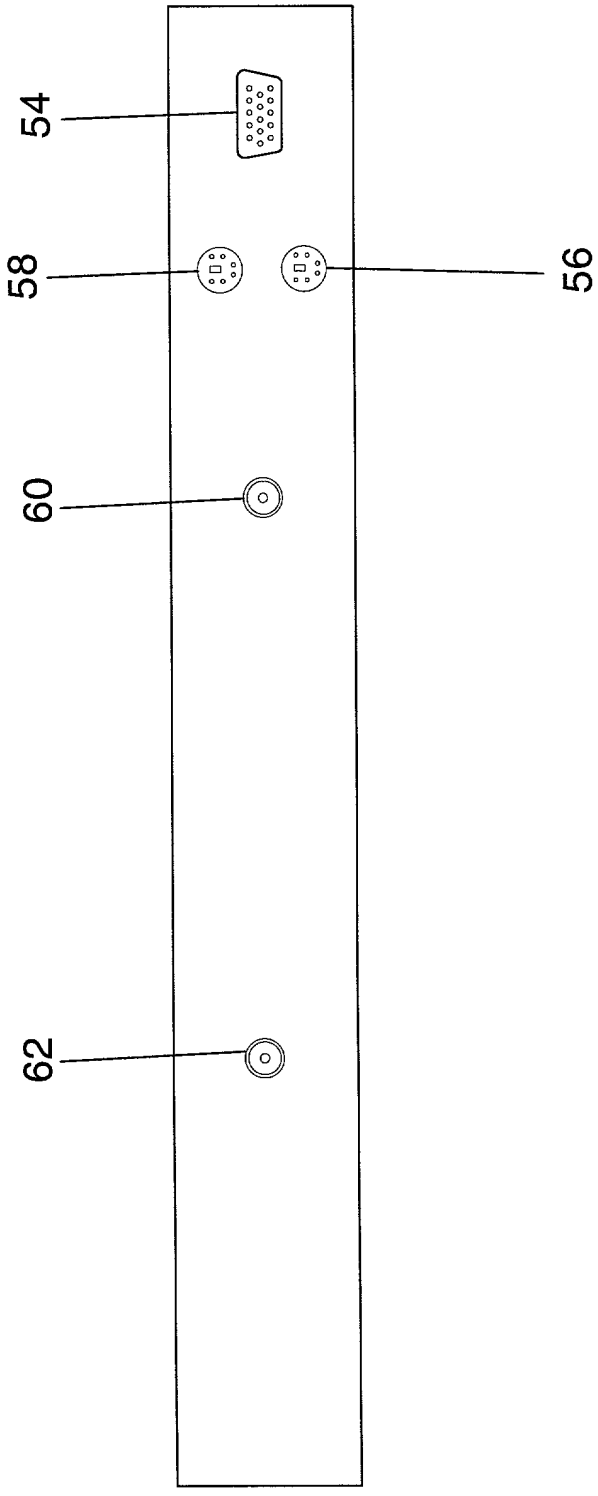

FIG. 2

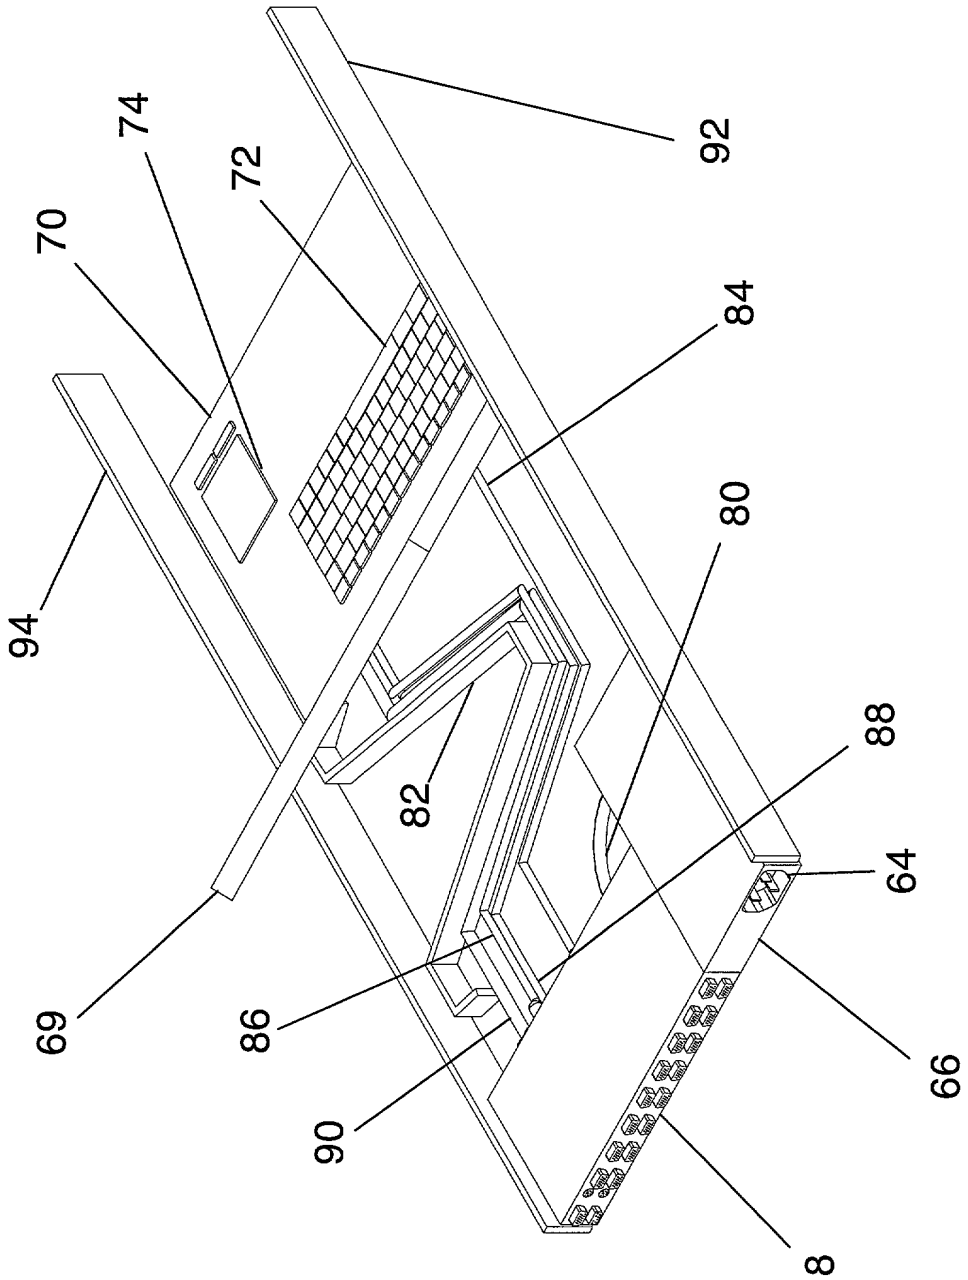

FIG. 3

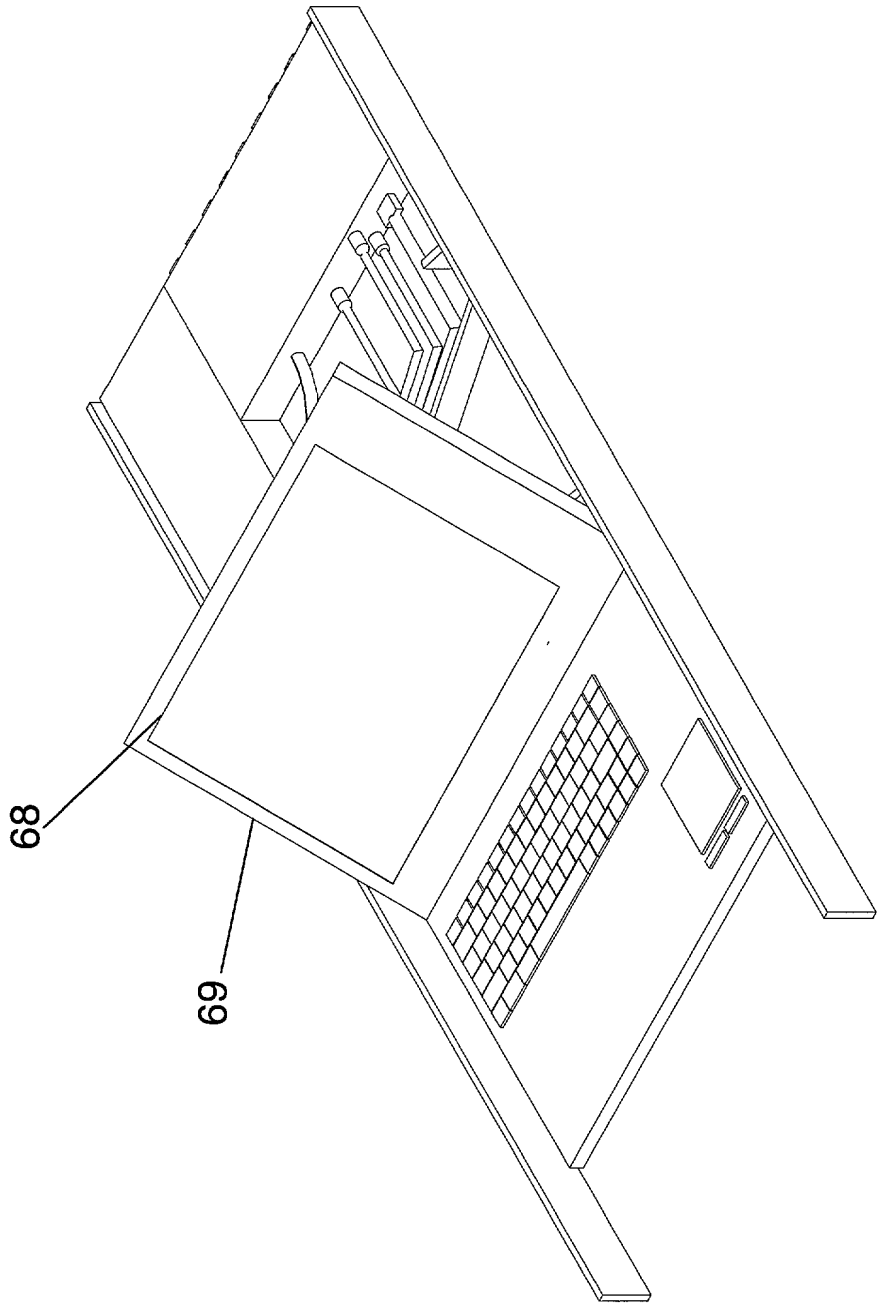

FIG. 4

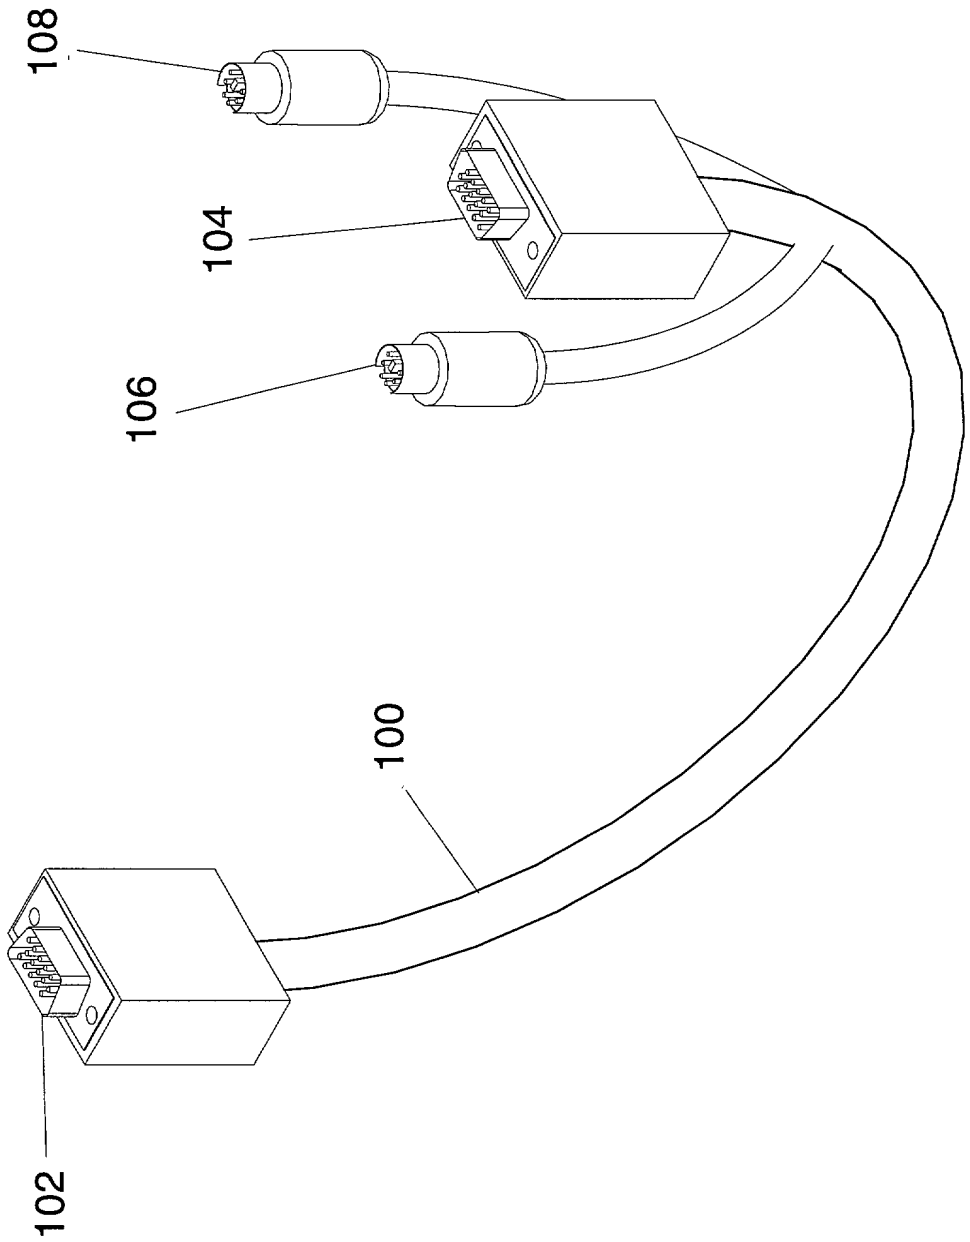

FIG. 5

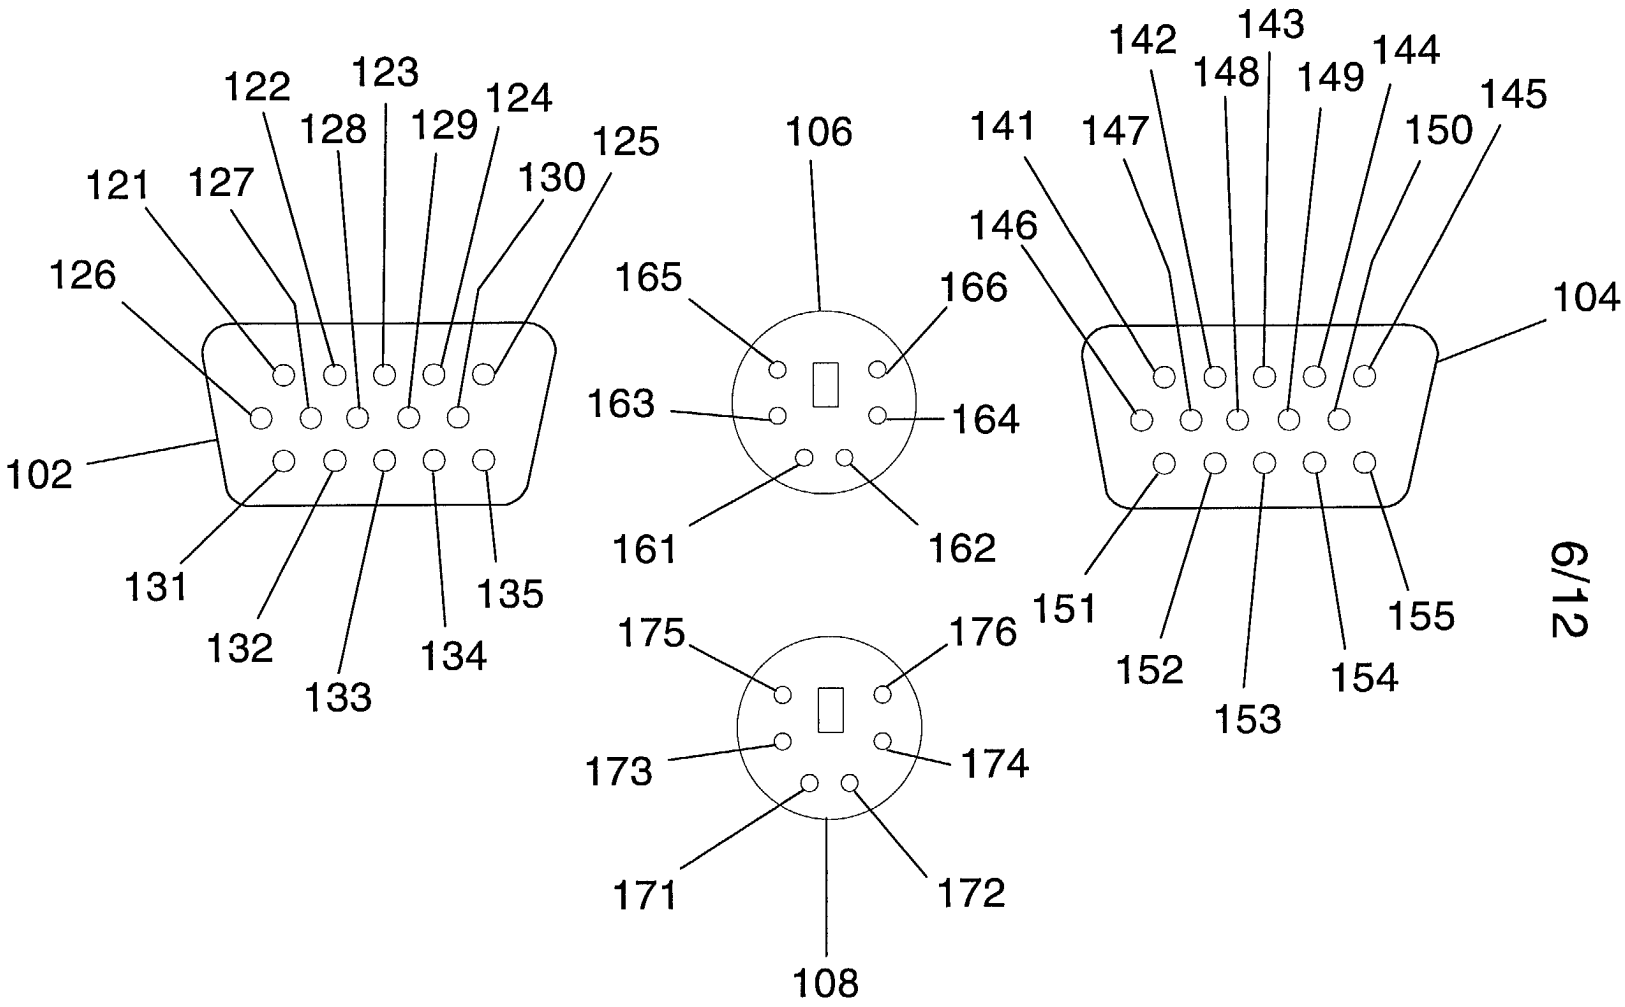
122
123
124
128
129
125
121
127
130
126
106
165
166
163
164
102
161
162
131
132
133
134
135
175
176
173
174
171
172
108
142
143
148
149
144
145
141
147
150
146
104
151
152
153
154
155

FIG. 6

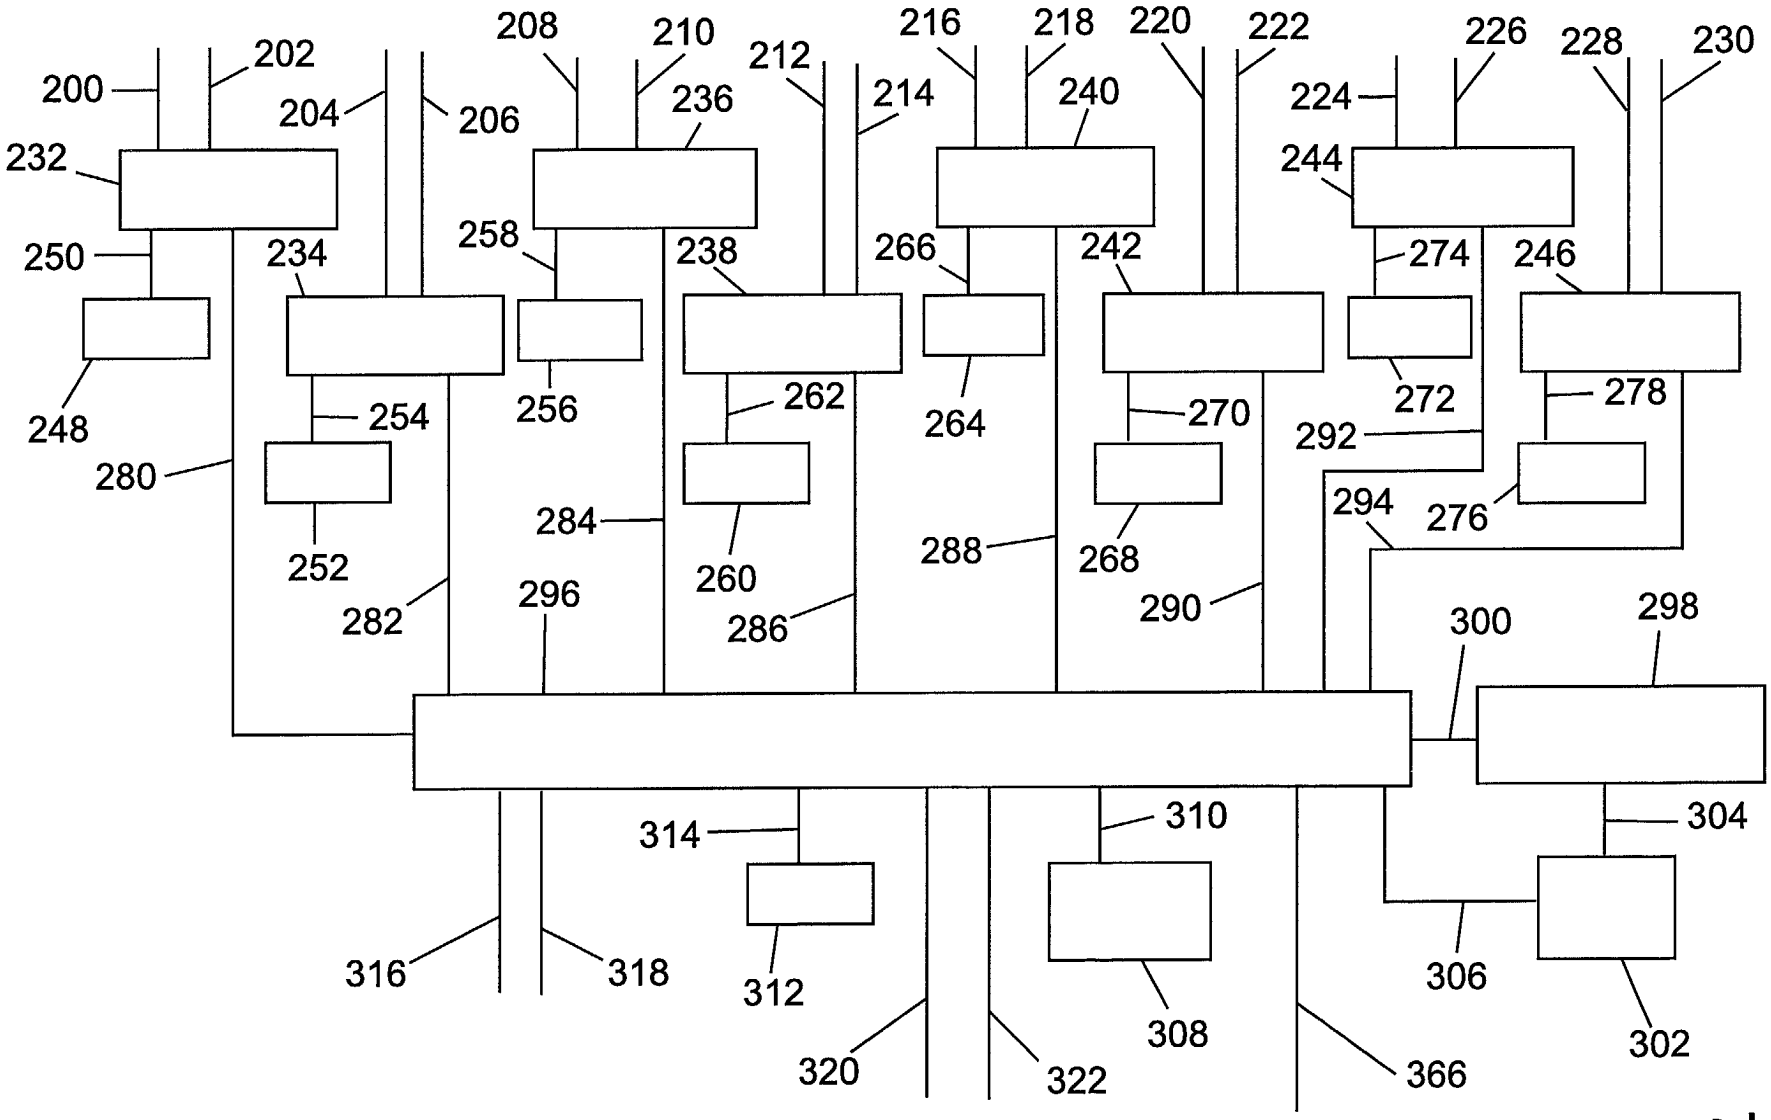
200
202
204
206
208
210
212
214
216
218
220
222
224
226
228
230
232
234
236
238
240
242
244
246
248
250
252
254
256
258
260
262
264
266
268
270
272
274
276
278
280
282
284
286
288
290
292
294
296
298
300
302
304
306
308
310
312
314
316
318
320
322
366

FIG. 7

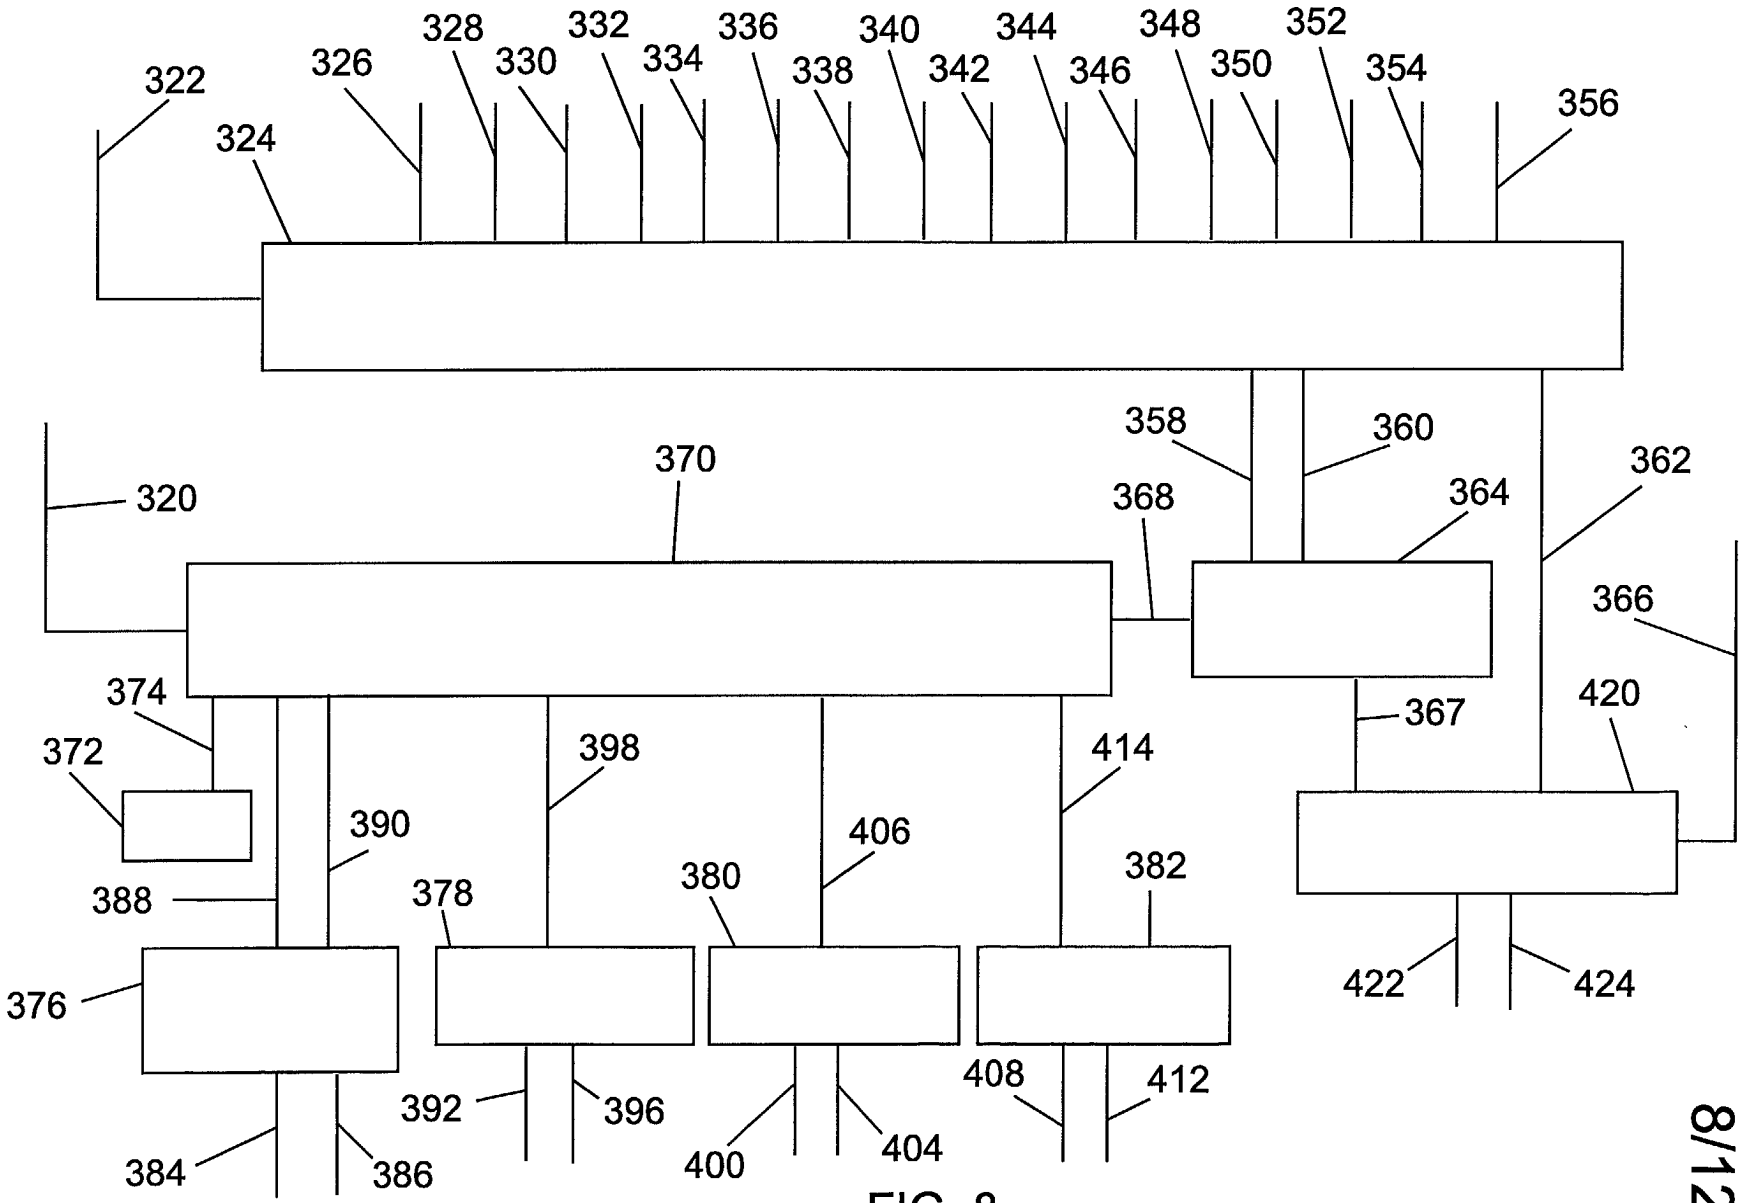
322
324
326
328
330
332
334
336
338
340
342
344
346
348
350
352
354
356
320
370
358
360
362
368
364
366
374
372
398
414
367
420
390
406
388
378
380
382
376
392
396
408
412
384
386
400
404
422
424

FIG. 8

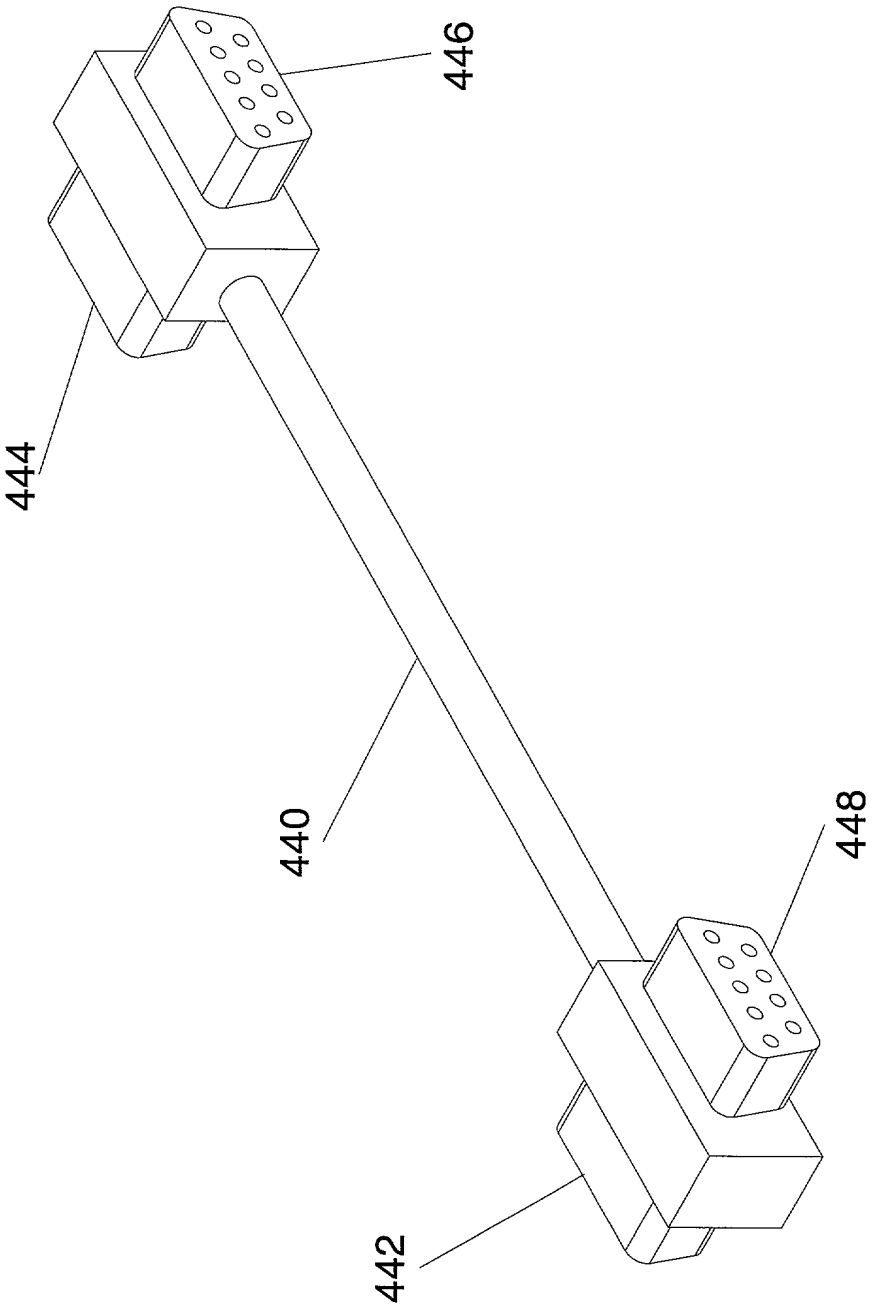

FIG. 9

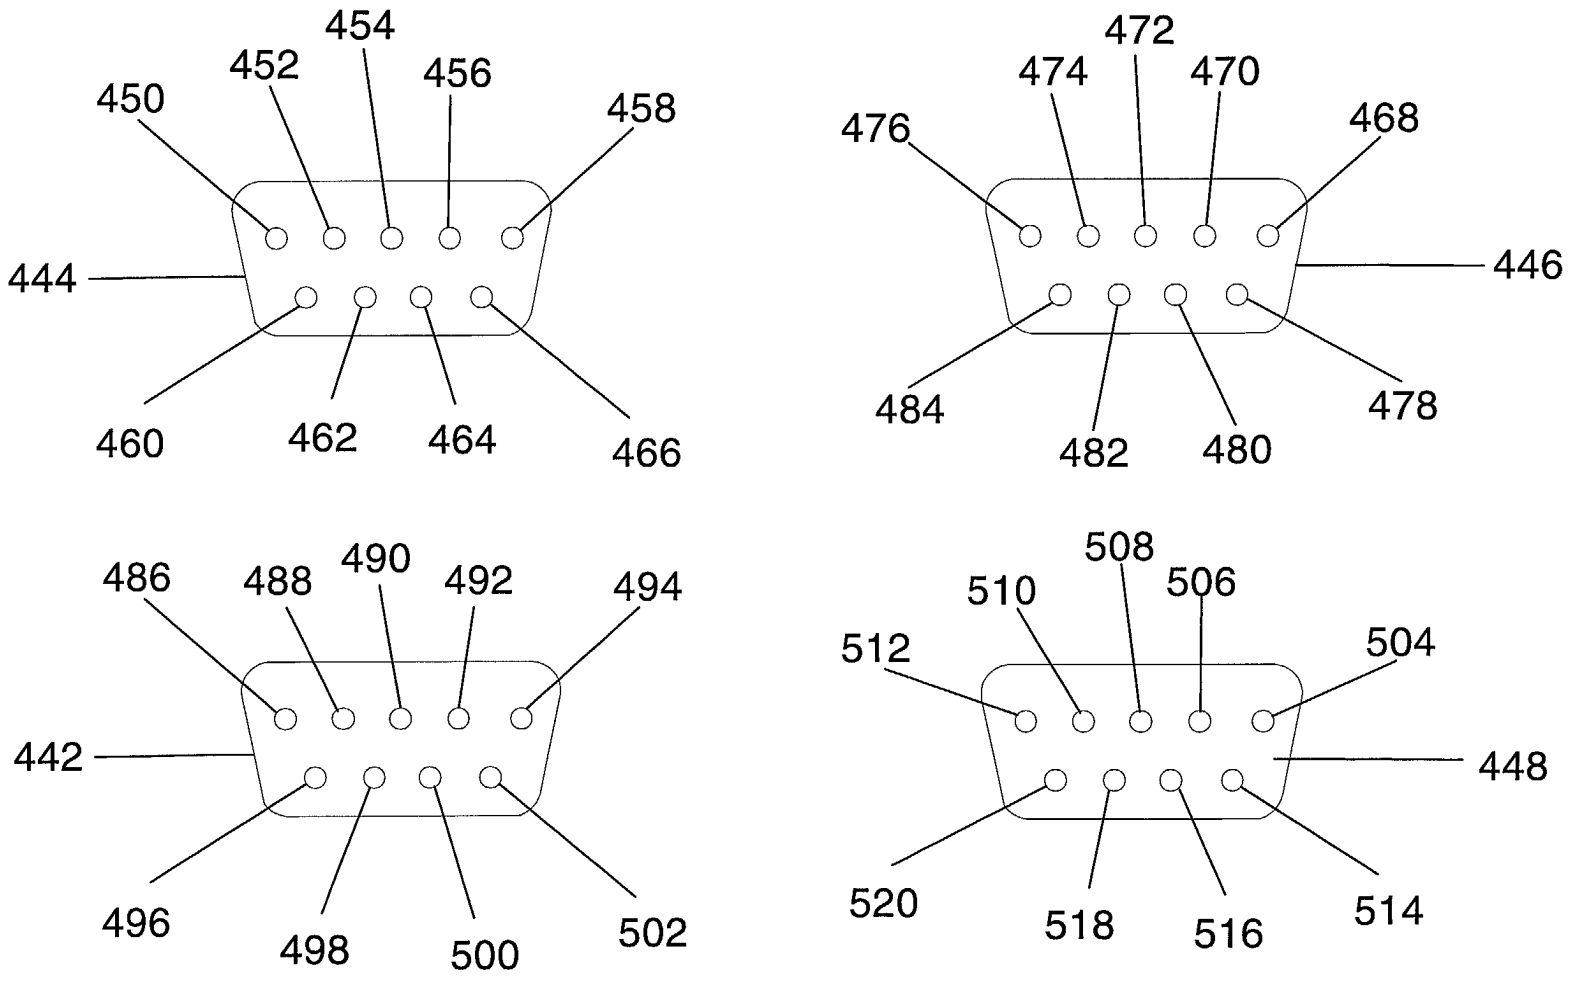
450
452
454
456
458
444
460
462
464
466
476
474
472
470
468
446
484
482
480
478
486
488
490
492
494
442
496
498
500
502
512
510
508
506
504
448
520
518
516
514

FIG. 10

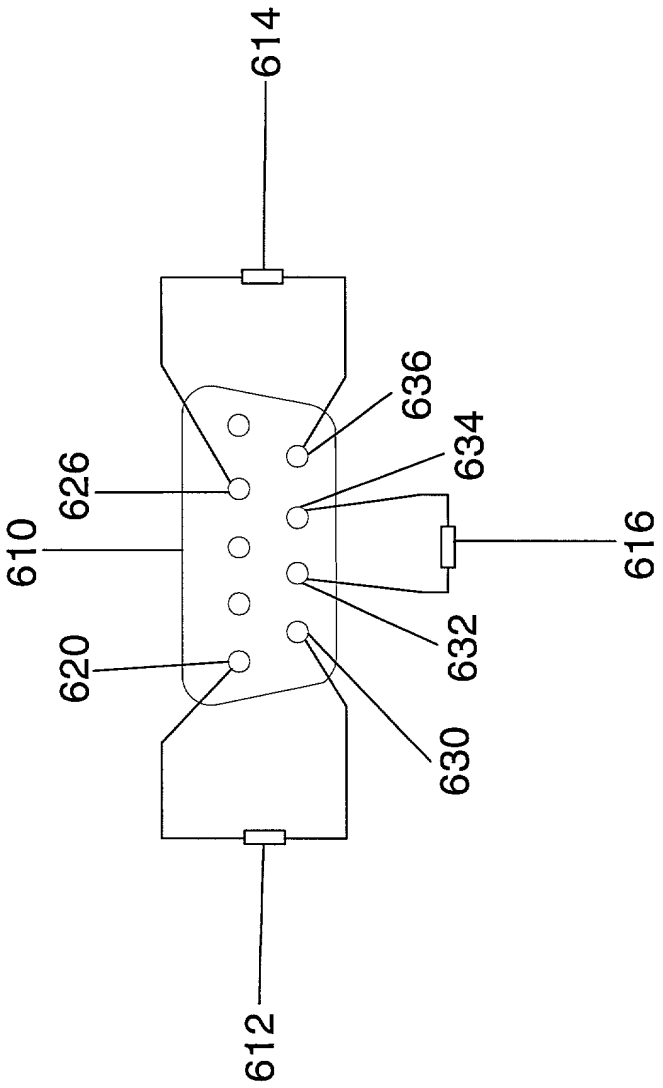

FIG. 11

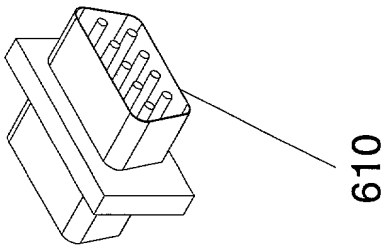

FIG. 12B

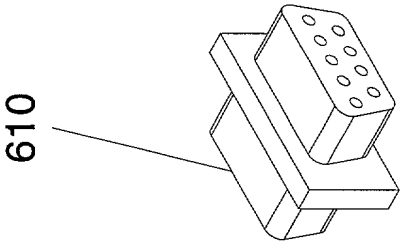

FIG. 12A

Please type a plus sign (+) inside this box → [+]

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	
First Named Inventor	Behrens, Edward
COMPLETE IF KNOWN	
Application Number	/
Filing Date	March 29, 2000
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A SYSTEM AND METHOD FOR REMOTELY CONTROLLING AND MONITORING A PLURALITY OF COMPUTER SYSTEMS

(Title of the Invention)

the specification of which
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) _____ as United States Application Number or PCT International Application Number _____ and was amended on (MM/DD/YYYY) _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES	NO
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → [+]

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number *(if applicable)*

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☐ Customer Number [ ] → *Place Customer Number Bar Code Label here*
OR
☒ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
Michael Ha	39,700		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label [ ] *OR* ☒ Correspondence address below

Name	Michael Ha, Patent Attorney				
Address	26322 Towne Centre Drive #238				
Address					
City	Foothill Ranch	**State**	CA	**ZIP**	92610
Country	United States	**Telephone**	949-716-0937	**Fax**	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
Edward	Behrens

Inventor's Signature	Edward Behrens					**Date**	3/27/00
Residence: City	Laguna Niguel	**State**	CA	**Country**	United States	**Citizenship**	US
Post Office Address	c/o Epicenter, Incorporated						
Post Office Address	14990 Penitencia Creek Road						
City	San Jose	**State**	CA	**ZIP**	95132	**Country**	US

☒ Additional inventors are being named on the 2 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → [+]

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 2

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Tho			Tu				
Inventor's Signature						**Date**	3/27/2000
Residence: City	Laguna Niguel	**State** CA		**Country** United States		**Citizenship**	US
Post Office Address	29292 Bobolink Street						
Post Office Address							
City	Laguna Niguel	**State** CA	**ZIP** 92677		**Country** United States		

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Van			Hua				
Inventor's Signature						**Date**	3/27/2000
Residence: City	San Jose	**State** CA		**Country** United States		**Citizenship**	US
Post Office Address	c/o Epicenter, Incorporated						
Post Office Address	14990 Penitencia Creek Road						
City	San Jose	**State** CA	**ZIP** 95132		**Country** United States		

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
David			Wang				
Inventor's Signature						**Date**	3/25/2000
Residence: City	San Jose	**State** CA		**Country** United States		**Citizenship**	US
Post Office Address	c/o Epicenter, Incorporated						
Post Office Address	14990 Penitencia Creek Road						
City	San Jose	**State** CA	**ZIP** 95132		**Country** United States		

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → [+]

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 2 of 2

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
John			Goodin				
Inventor's Signature	John Goodin					**Date**	3/27/00
Residence: City	Coto de Caza	**State** CA		**Country** United States		**Citizenship**	US
Post Office Address	c/o Compression, Incorporated						
Post Office Address	25242 Arctic Ocean						
City	Lake Forest	**State** CA	**ZIP** 92630	**Country** United States			

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Robert			Matthes				
Inventor's Signature	R Matthes					**Date**	3/27/00
Residence: City	San Clemente	**State** CA		**Country** United States		**Citizenship**	US
Post Office Address	c/o Compression, Incoporated						
Post Office Address	25242 Arctic Ocean						
City	Lake Forest	**State** CA	**ZIP** 92630	**Country** United States			

Name of Additional Joint Inventor, if any:	☐ A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
Inventor's Signature						**Date**	
Residence: City		**State**		**Country**		**Citizenship**	
Post Office Address							
Post Office Address							
City		**State**		**ZIP**		**Country**	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Power of Attorney

I, Edward Behrens, President of Epicenter, Incorporated, a California Corporation, of Laguna Niguel, Orange County, California appoint Michael Ha, of Foothill Ranch, Orange County, California as my attorney in fact to act in my place for the purposes of corresponding with and appearing before the United States Patent and Trademark Office concerning a patent application titled "A SYSTEM AND METHOD FOR CONTROLLING AND MONITORING A PLURALITY OF COMPUTER SYSTEMS."

I further grant to my attorney in fact full authority to act in any manner both proper and necessary to the exercise of the foregoing powers, including filing a patent application and responding to Office Actions and ratify every act that he may lawfully perform in exercising those powers.

This power of attorney is granted for a period of two (2) years and shall become effective on March 8, 2000 and shall terminate on March 8, 2002.

Executed this 20TH day of MARCH, 2000, at LAKE FOREST, California

By: Edward Behrens,
President of Epicenter, Incorporated, a California Corporation

Notarization

State of California)
) ss
County of Orange)

On this 20 day of March, in the year 2000, before me, a Notary Public, State of California, duly commissioned and sworn, personally appeared Edward Behrens, personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to this instrument, and acknowledged that he executed it.

Shawn R. Conn
Notary Public

SHAWN R. CONN
COMM...1184743
NOTARY PUBLIC-CALIFORNIA
ORANGE COUNTY
My Term Exp. May 24, 2002

State of California

My commission expires 5/24, 2002